


INSTALLATION GUIDE


# Millboard Envello Shadow Line+ Vertical Cladding System

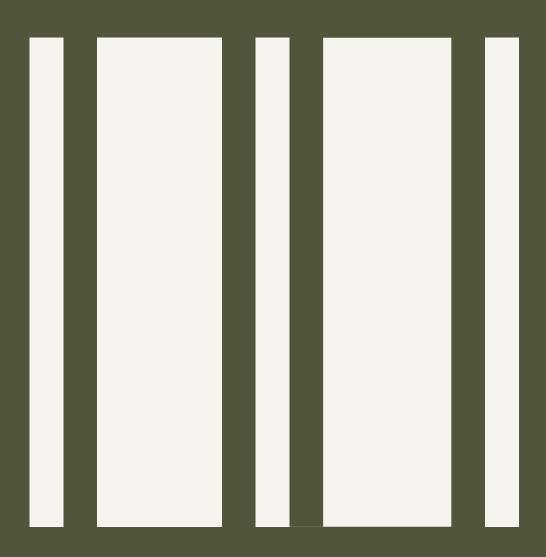

# CONTENTS

1.0	APPLICATION & SAFETY STATEMEN	T	6.0	INSTALLATION
			7.1	Corners
2.0	ABOUT ENVELLO CLADDING		7.2	Inter Story Junction
2.1	About	08	7.3	Joining Boards
2.2	Product Overview	09	7.4	Windows and Doors
			7.5	Wall Penetrations
3.0	PRODUCT SUITABILITY		7.6	Installation Abutting Rendered Surface
3.1	Intended Use & Limitations		7.7	Barge Detail
			7.8	Parapets
4.0	PRE-INSTALLATIONS		7.9	Transition to Brick/Monolithic
4.1	Storage & Handling	16		
4.2	Board Set-Out			
4.3	Tools & PPE Required			
4.4	Cutting	18		
4.5	Fire Performance	18		
5.0	MATERIALS			
5.1	Colour Characteristics	22		
5.2	Material Calculator			
5.3	Accessories	26		
5.4	Fixings	28		
5.5	Cut End Colour Matching	30		
5.6	Additional Items	31		
6.0	PREPARATION			
6.1	Cavity Batten Layout	34		
6.2	Fixings			
6.3	Base to Wall (Concrete Floor)	38		
6.4	Windows and Soffits	41		

ISSUE 2025.Q2 [3

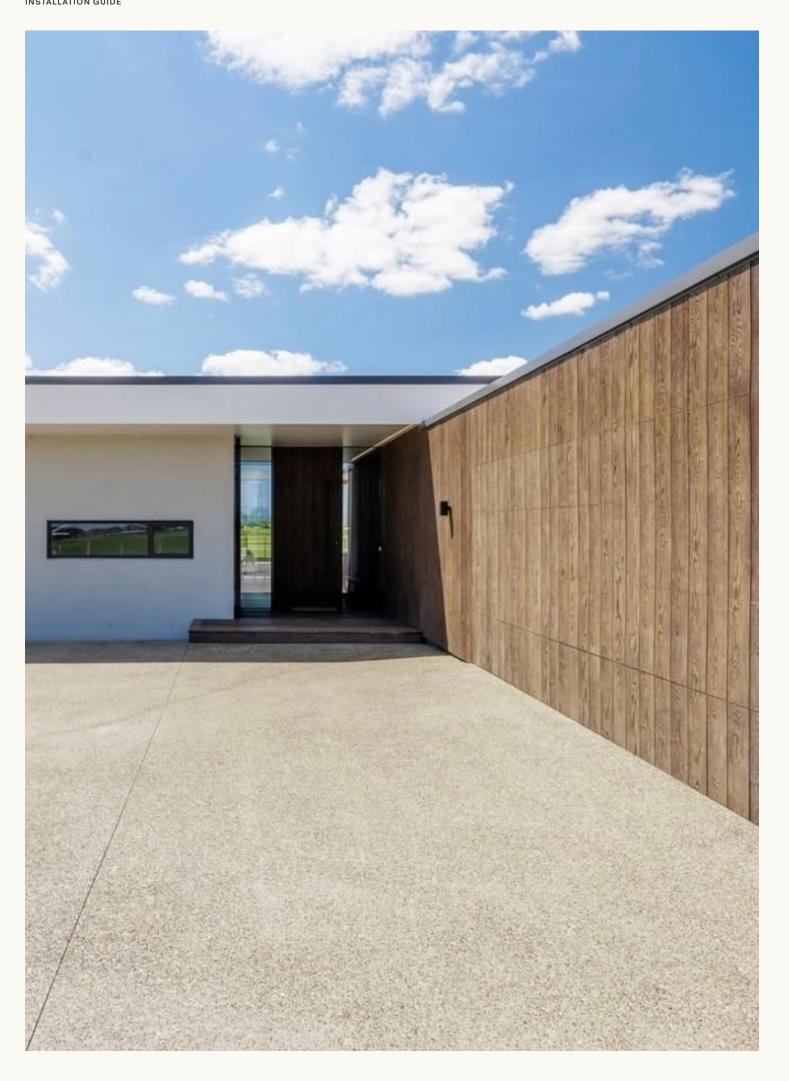

ISSUE 2025.Q3 [5]

### 1.0

# APPLICATION & SAFETY STATEMENT

# Read these instructions in full before starting installation

The information in this Installation Guide is intended for competent, licensed building practitioners. It must be read together with the Millboard Envello Vertical Cladding Design Guide, project drawings and the current New Zealand Building Code (NZBC).

#### **Installer Obligations**

- Envello Cladding must be installed by a competent Licensed Building Practitioner
- Install Envello Cladding strictly in accordance with the latest Envello Cladding instructions, relevant standards and local building regulations.
- Use only approved fasteners, accessories and safety procedures.
- Verify that the product meets visual/aesthetic requirements before fixing. Forté
  will not be responsible for aesthetic concerns and variations that are apparent after
  installation.

### Warning

Failure to follow these instructions may result in personal injury, property damage, non compliance with the CodeMark certificate, and **will void the Millboard Envello Cladding warranty**.

#### **Exclusion of Liability**

Other than the rights and remedies that cannot be excluded under New Zealand law, Forté provides the Envello product "as is" and excludes all other warranties, conditions and liabilities (whether in contract, tort—including negligence—or otherwise). Forté is not liable for any indirect or consequential loss arising from installation or use of Envello Cladding. Where doubt exists, seek advice from a Chartered Professional Engineer or Forté Technical Support before proceeding.

# ABOUT ENVELLO CLADDING



ISSUE 2025.Q2 [7



Crafted from limestone and fibre-reinforced resin mineral, Envello is an innovative, weather-resistant and low maintenance cladding system designed to withstand demanding outdoor environments.

Envello cladding uses a unique material, unrivalled across the globe. Take a closer look at the construction and performance of this stunning yet functional cladding.

# ABOUT

TOUGH	The unique surface layer is more resistant to scratches and is designed to better withstand demanding outdoor environments	
ENDURING	The dual-tone surface layer is hand coloured using pigments designed to improve resistance to sun damage and fading.	
BEAUTIFUL	Each length is hand moulded using specially selected timber masters for an unrivalled organic wood-grain appearance in a resin mineral board material.	
FIRE RATED	Shadow Line+ is fire rated to NZ Fire Rating Group 3 (D-s3, d0) for added assurance and quality.	
DURABLE	Envello will not split, rot or harbour insects like timber does.	
LIGHTWEIGHT	Our unique closed 'cellular' internal structure reduces weight while maintaining strength and increasing thermal performance.	
STRONGER	The structural core is a blend of natural minerals bonded in a polymer resin with renewable biopolymers and fibre reinforcement for added strength and durability.	
WOOD FREE	Envello cladding is wood-free and non-porous which, in comparison to timber, means there's no leaching or releasing of tannins to other surfaces.	



ISSUE 2025.Q3 [9]

### 2.2

### PRODUCT OVERVIEW

A smooth and authentic timberlook cladding board with an enhanced offering. The Shadow Line+ board has been designed to perfectly replicate smooth timber with a flat grained finish, giving a clean authentic look. The increased width of Shadow Line+ boards, compared to standard timber boards, ensures larger grain detail and enhanced visual impact, without the risk of the board twisting or warping over time. The indent created between boards gives definition to the individual grain patterns, adding to the overall authentic timber-look aesthetic.

Another key feature of Shadow Line+ is its weather resistance. As with Millboard's decking composition, Shadow Line+ is formulated with the same unique mineral mix, further developed to achieve the required fire rating.

01 Environmentally friendly 02 Does not warp or rot like wood 03 UV & weathering stability 04 Increased thermal performance 05 Resistant to algae











06 Moulded from real 07 Lightweight 08 Wood-free







### Crafted to be perfectly imperfect


The moulds used to create Envello cladding boards have been specially crafted from carefully selected oak timber. The fine detail and natural imperfections of the oak ensure each board has an authentic timber-look. From the initial laying of the elastomeric surface, right through to the pouring of the fibre-reinforced resin mineral, and hand-colouring each board individually, Envello guarantees a quality, unique finish with added durability due to enhanced technology and craftsmanship.

# PRODUCT SUITABILITY





Envello cladding is designed for use on low-rise residential homes and select commercial projects, offering a durable, high-performance solution with the authentic look of timber.

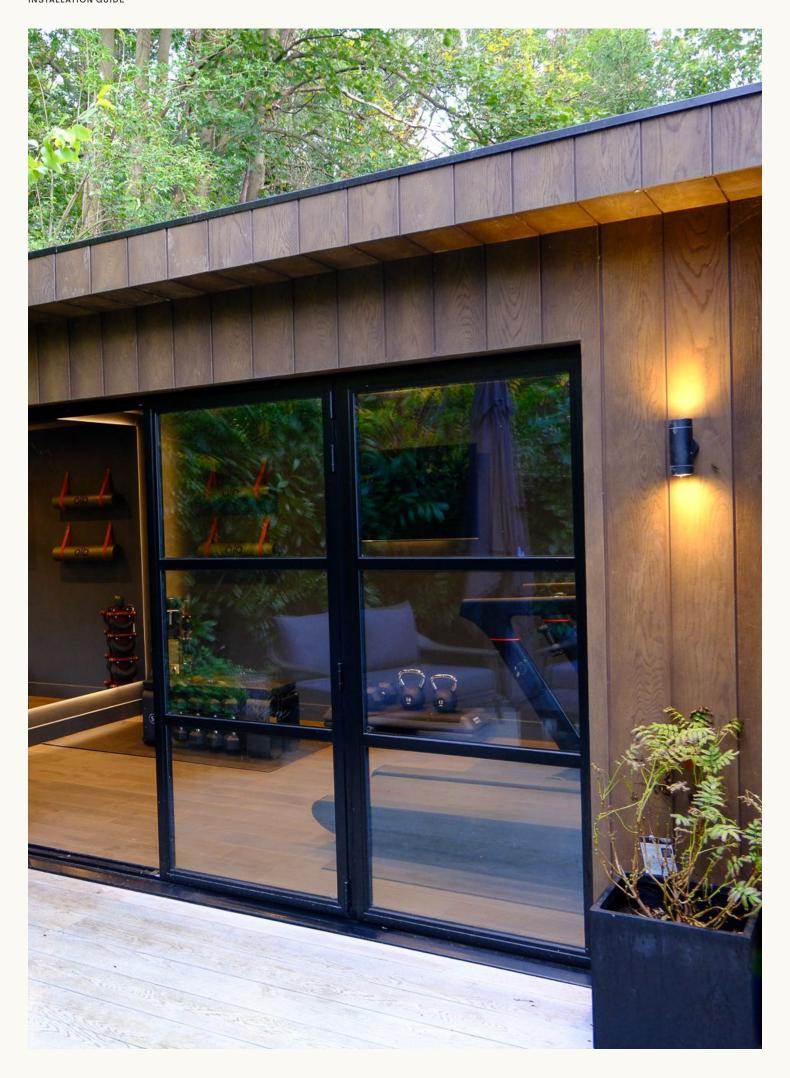

ISSUE 2025.Q3 [13]

### 3.1

### INTENDED USE & LIMITATIONS

The following guidance outlines where the Forté Envello Cladding System can be used, and any limitations or conditions that apply to ensure safe, compliant and long-lasting installations.

#### Intended Use

Envello cladding has been designed as a cladding system for low-rise residential and select commercial buildings that are;

- Up to 10m in height and greater then 1m from the boundary
- In wind zones up to and including extra high as defined in NZS 3604:2011
- To design wind pressure (ULS) of 2.1kpa

To ensure the best installation and long-term performance, Envello cladding is to be installed by a professional or experienced trades person LBP.

It is the property owner's responsibility to make sure that the plans meet relevant NZBC building codes before the installation of the Envello cladding System commences. Envello cladding must also be supported by a suitable substructure that is in accordance with the NZBC (New Zealand Building Code) NZS 3604:2011

Envello cladding is a rainscreen cladding system which can be described as 'a wall comprising of an outer skin of cladding boards and a wind-tight insulated backing wall separated by a ventilated cavity'. Some water may penetrate into the cavity but the rainscreen cladding is intended to provide protection from direct rain, therefore a free-draining cavity should always be included in the detailed design of the building. It is not recommended to use Envello Cladding in structural applications as it would need to be fixed to a structural frame of battens.

#### Performance

When installed and maintained by a qualified trades person, using accepted trade practices as specified in this manual, it will meet the applicable requirements of the NZBC;

- B1 Structure
- B2 Durability
- E2 External Moisture
- F2 hazardous Building Materials.

### Warranty

The Envello cladding System has a 15 year limited structural warranty. Refer to <a href="www.knowledge.forte.co.nz/resources">www.knowledge.forte.co.nz/resources</a> for more details.


#### Limitations

This installation guide is not exhaustive as the responsibility for design lies with the specifier or responsible party for the project to ensure the final design meets the requirements of the intended application and relevant building codes.

It is the responsibility of designers, installers, and owners to ensure that the information in this manual is current, by checking with Forté or referring to our website. As new technology is introduced or industry standards are altered, Millboard reserves the right to alter existing specifications and remove products without notice. Visit the Forté website at www.forte.co.nz for more information.

The use of this manual does not guarantee acceptance or accreditation of a design, material or building solution by any entity authorised to do so under law; does not mean that a design, material or building solution complies with the building codes; or does not absolve the user from complying with any local, or Government legal requirements.

# PRE-INSTALLATION

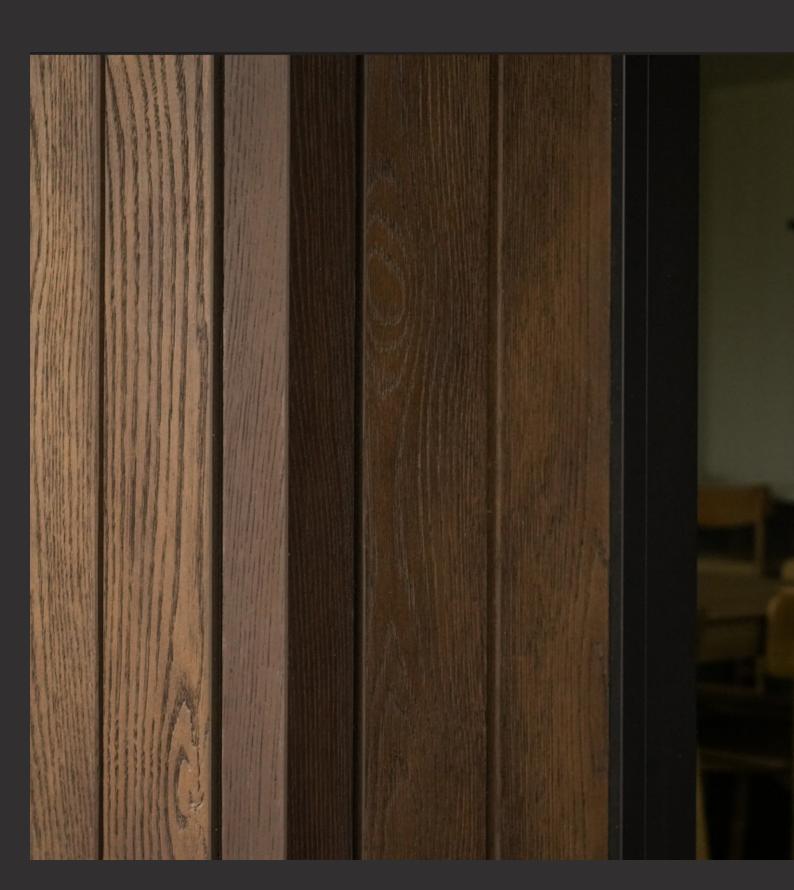

ISSUE 2025.Q2 [15]



Proper storage, layout planning and selecting the right tools are essential pre-installation steps to protect Envello boards and ensure a smooth, efficient installation process.

4.1	Storage & Handling	16
4.2	Board Set-Out	
4.3	Tools & PPE Required	
4.4	Cutting	18
4.5	Fire Performance	18

# STORAGE & HANDLING

Envello cladding boards should always be stored on a flat surface at a maximum of 400mm apart. The boards must be stacked with both prefinished sides facing each other, not back-to-face and both external and internal corner profiles should be fully supported along their length.

When loading and unloading by hand, ensure both ends of the board are lifted on the edge to avoid permanent deformation and/or damage.

The boards should only be lifted off the stack, not dragged, to eliminate the risk of marking the surface. The boards should be carried on their side, by two people, for increased rigidity. It is recommended that gloves and long sleeves be worn when handling the boards and extra care is taken when lifting and carrying them.

It is recommended that the cladding boards are stored on site at least 72 hours before installation to allow the boards to acclimatise.

Forté do not take responsibility for damage caused by improper storage and handling of the product.

#### **Tolerances**


There will always be a slight variance in the board's dimensions due to the boards being moulded from natural oak, and the pressure of the moulding process. Despite this, each board is calibrated to ensure a consistent profile is maintained.

The manufacturing tolerances are: Width: ± 3mm. Length: ± 5mm. Thickness: ± 2mm.

When working with the boards, a level may be required to help keep the boards running upright. In order to achieve straight and consistent 5-6mm gapping between boards, it may be necessary to use Envello Multi-Spacers during the installation process.




Stack boards face-to-face




Ensure boards are on a flat surface or bearers max. 400mm apart



Lift boards on the edges using 2 people to lift at a time



Do not drag the boards off the stack



Ensure boards are secured to the pallet before transporting

ISSUE 2025.Q3 [17]

### 4.2

### BOARD SET-OUT

Envello has up to five different grain patterns to ensure a random grain pattern layout.

The boards should be sorted into piles of the different grain patterns prior to installation. When installing the cladding boards, ensure that you pull from a different pile each time and alternate the board end cuts to further vary the grain pattern layout.

### 4.3

# TOOLS & PPE REQUIRED

Please refer to the below tools and PPE required to install Envello cladding.

If you are unsure on how to use any tools, please consult the manufacturer's user manual.

- Mitre saw/jigsaw/handsaw: Envello cladding products can be cut with standard wood cutting tools. We recommend using a carbon-tipped saw blade to cut the boards and an aluminium cutting blade for the metal trims.
- Tool set: Standard carpentry tools will be needed to complete the installation, including a tape measure, pencil, set square, planer, stanley knife, surform and a drill bit set.
- Spirit level: A spirit level is used to ensure that the battens are level and the boards are upright.
- Personal Protective Equipment: When handling Envello products, it is advised to wear long sleeves and gloves. When cutting products, we recommend wearing a FFP3 dust mask, ear muffs and safety glasses.
- Power drill and driver: Standard power drill drivers can be used to fix the cladding boards.

### CUTTING

Accurate cutting is essential to achieving a clean, professional finish, ensuring proper board alignment, maintaining product integrity and preserving the overall appearance of the cladding system.

When cutting Envello boards or corner profiles with standard wood cutting tools, we recommend using a carbon-tipped saw blade (a dust bag or vacuum must be used on mitre saws).

For the metal trims, an aluminium cutting blade should be used. Ensure the boards are adequately supported when cutting with the boards facing up for a cleaner finish.

When the board is cut, touch-up coating should be used if the cut is visible and exposed to UV. Dispose of the off-cuts as general waste, don't burn them at home.

#### IMPORTANT:

- Work in outdoor areas with ample ventilation.
- Minimise dust from cutting by using a mitre saw with a dust bag or vacuum.
- Warn other in the immediate area to avoid breathing dust.
- Wear the correct PPE (long sleeves and gloves, FFP3 dust mask, ear muffs and safety glasses).
- If there is a breeze/wind when cutting the boards, locate the saw downwind so the
  excess dust is blown away from the operator and other in the immediate area.


### 4.5

### FIRE PERFORMANCE


Envello Shadow Line+ cladding boards are crafted with fire retardants in the board composition and have been tested to NZ Fire Rating Group 3 ensuring they have a classification of D-s3, d0. In general, Shadow Line+ cladding can be used on low rise residential and some commercial properties that are below 10m in height and are more than 1m from the boundary. The responsibility for the cladding's suitability in the required location is to be determined by a certified building professional (building control, building insurance, fire officer).

Forté does not take responsibility for incorrect specification, application, or product installation in areas not in accordance with NZ government guidance. Current guidance should be gained from the government website relating to the geographic location of the project.

ISSUE 2025.Q3 [19]

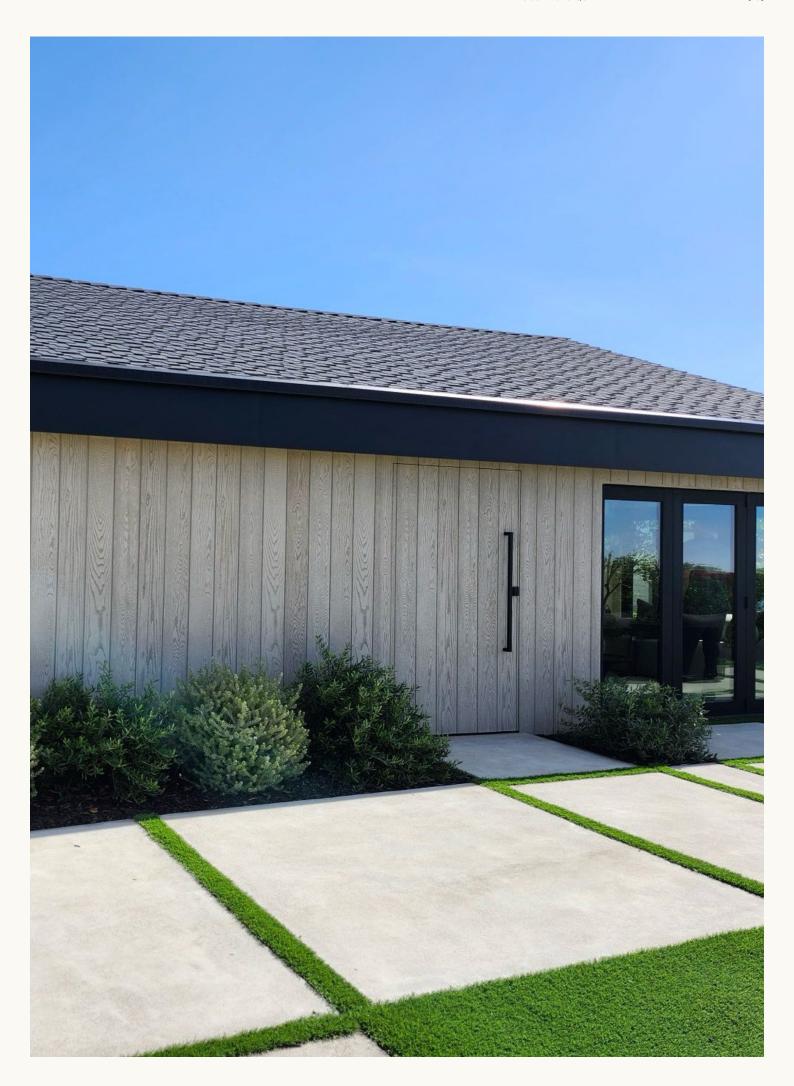

# MATERIALS

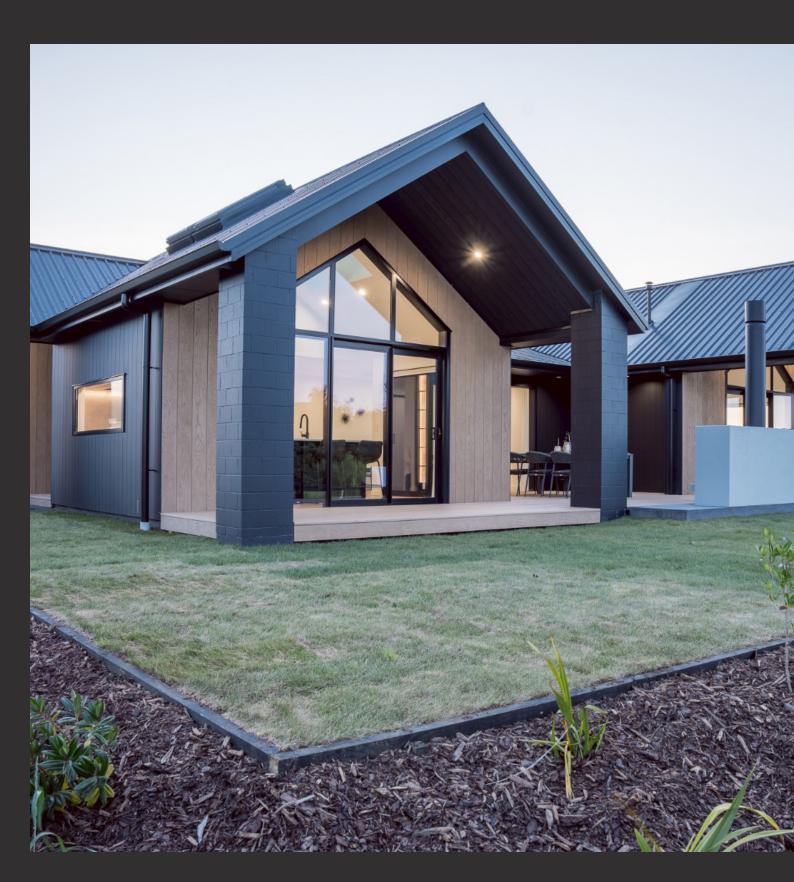

ISSUE 2025.Q2 [21]



Understanding the unique characteristics of Envello cladding and its components is key to achieving a successful installation and an authentic, long-lasting finish. Careful preparation ensures the best result.

5.1	Colour Characteristics	22
5.2	Material Calculator	
5.3	Accessories	26
5.4	Fixings	28
5.5	Cut End Colour Matching	30
5.6	Additional Items	31

# Envello cladding is crafted to replicate timber's natural tonal variations, offering durable, low-maintenance performance. Colour differences between boards are intentional and enhance its authentic appearance and long-

term weathering character.

### COLOUR CHARACTERISTICS

Great care and consideration go into ensuring each Envello cladding board has a unique timber-look appearance. To achieve the look of natural timber, secondary toning colours are used, which may result in colour variance within the same board or between boards.

Envello cladding has been designed to replicate the natural variances of timber and is manufactured to have tonal variance in the colour.

To reduce the amount of variation between boards, Envello cladding product should be purchased in one order to ensure the colour is consistent. If you have multiple batches for your project, purchased at different times, it is recommended to mix the boards from different batches to help with balancing out the colour variation.

It is important to note that the Antique Oak cladding product has more tonal variation per individual board than any of the other colours in the Envello range. As with all products exposed to the sunlight (UV), Envello will naturally weather and tone down over time. Loss of gloss is perfectly normal and will not affect the performance of the products.


Upon delivery, if you find the colour unacceptable or believe them to be defective in any way, please contact a Forté representative. If there are any unforeseen issues with the boards, this should be highlighted with Forté before installation.

Envello cladding is made to last. The careful steps taken to hand-mould and colour each board, further enhanced by its high performance, durability and low-maintenance, ensures it outperforms other timber alternative products on the market.



ISSUE 2025.Q3 [23]


Antique Oak boasts more tonal variation per individual board than the other colours in the Envello range

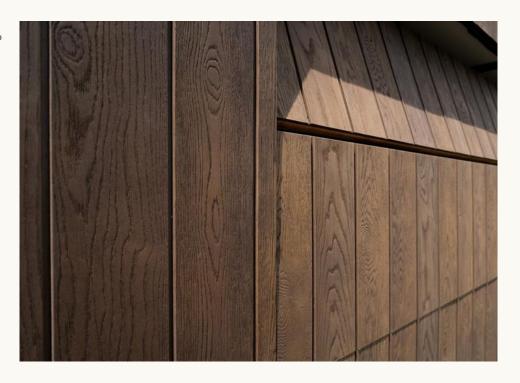

# MATERIAL CALCULATOR

The area (m2) is the total wall area to be clad.

- Area (m2) = [(width x height) (area of any windows & doors)]
- Number of boards =  $m2 \times 1.54$

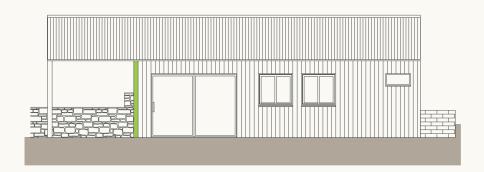


### **Vertical Installation**

Perforated closures will be needed at the bottom of the cladding and above any window or door heads

Number of perforated closures =

[(width of cladding area) + (width of all windows) + (width of all doors)]

3

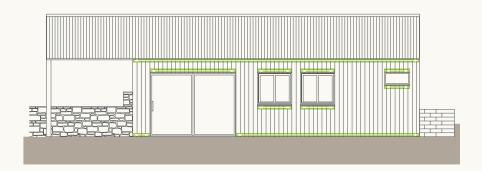

### Corners

External/Internal Corner Profiles =

total linear m for corners

3

Extra perforated closures = Number of corner profiles



ISSUE 2025.Q3 [25]

### **Fixings**

Number of boxes 75mm fixings =

number of cladding boards x 10 250 (number of screws per box)

20mm fixings =

number of perforated closures + corner profiles x 14 250 (number of screws per box)

Envello Coloured Head Screws =

number of cladding boards
100 (number of screws per box)

### TIP

Allow extra material for wastage and offcuts. We would recommend adding at least 10% to the quantities, as complex designs may require more material



# ACCESSORIES

Envello Shadow Line+ Cladding Boards



Prefinished Reveal Boards For Window Detailing



Shadow Line+ External Y Flashing



DIMENSIONS	200 x 18 x 3600mm	16mm T x 146mm W x 3600mm L	50mm T x 50mm W x 3600mm L
APPLICATION	For vertical use only on low- rise residential and some commercial projects	For finishing the edges around windows/doors	Designed to create a seamless mitred corner. Can be colour matched to colorsteel range
EFFECTIVE COVER	180mm	-	-
BOARDS PER M <sup>2</sup>	1.54	-	-
FIXINGS	75mm fixings	Coloured Head screws	20mm fixings
	Coloured Head screws		
PRODUCT CODES	Smoked Oak ESL-S	Smoked Oak ERB-S	Smoked Oak EYF-S
	Antique Oak ESL-A	Antique Oak ERB-A	Antique Oak EYF-A
	Golden Oak ESL-G	Golden Oak ERB-G	Golden Oak EYF-G
	Burnt Cedar ESL-BC	Burnt Cedar ERB-BC	Burnt Cedar EYF-BC
	Limed Oak ESL-L	Limed Oak ERB-L	Limed Oak EYF-L
	Coppered Oak ESL-C	Coppered Oak ERB-C	Coppered Oak EYF-C







**ISSUE 2025.Q3** [27]


**Shadow Line+ External Corner Profile** 



**Shadow Line+ Internal Corner Profile** 



Perforated **Closure Trim** 



DIN	ΙEΝ	SIO	NS
-----	-----	-----	----

APPLICATION

FIXINGS

50mm T x 50mm W x 3050mm L

Finishing off the external

recommended to go as high as

one board length

Perforated closure, 20mm fixings.

corner of a building. Only

PRODUCT CODES

Smoked Oak EEC-S

Antique Oak EEC-A

Golden Oak EEC-G

Burnt Cedar EEC-BC

Limed Oak EEC-L

Coppered Oak EEC-C

38mm T x 38mm W x 3050mm L

Finishing off the internal corner of a building. Only recommended to go as high as one board length

Perforated closure, 20mm

fixings.

Smoked Oak EIC-S

Antique Oak EIC-A

Golden Oak EIC-G

Burnt Cedar EIC-BC

Limed Oak EIC-L

Coppered Oak EIC-C

50mm T x 25mm W x 3000mm L

To prevent pests getting into the cavity behind the boards, whilst allowing airflow

20mm fixings


**EA-PCT** 







### STAINLESS STEEL FIXINGS



### 75MM FIXING SCREWS - CLADDING BOARDS

Envello Cladding boards should be fixed through the tongue using 4.2x75mm cladding fixings – one fixing at each batten intersection, and two fixings per batten where boards are joined. Fixings should be inserted through the guide groove on the tongue, angled slightly toward the board, with the head sitting flush with the surface.

DIMENSIONS	4.2mm W x 75mm L	
FORMAT	Box of 100 or 200	

# 20mm fixings




Fig. 8 - Use of perforated closure on corner profile

# 20MM ACCESSORY SCREWS - PERFORATED CLOSURE SCREWS

Perforated closures should be used using the 3.5x20mm fixing screw.

DIMENSIONS	3.5mm W x 20mm L
FORMAT	Box of 250

AHHHI



#### COLOUR HEAD FIXING SCREWS

Colour head screws are surface fixed through the cladding board, so the head sits flush with the top layer of the board.

DIMENSIONS	3.5mm W x 40mm L	
FORMAT	Box of 100	-

<sup>\*</sup>All accessories available in matching colour profiles. Colour pairings available for Y Profiles.



### CUT END COLOURING MATCHING

Envello cladding is crafted to replicate timber's natural tonal variations, offering durable, low-maintenance performance. Colour differences between boards are intentional and enhance its authentic appearance and long-term weathering character.

When Envello boards are cut to length, the exposed ends may reveal a lighter core material. Although this has no effect on the board's durability or performance, applying touch-up coating can improve the visual continuity of the installation—particularly in high-visibility areas or where the ends are exposed.

Envello is inert in composition and does not require end-grain sealing for protection. The use of touch-up coating is purely aesthetic and optional, but recommended where a uniform appearance is desired. The coating is available in colours matched to the standard Envello ranges for ease of application on site.

Please note, this product is not suitable for repairing boards or touching up the surface/ face of the boards. The colour is not a perfect match and is not durable due to it being a water-based material.



ISSUE 2025.Q3 [31]

# 5.6

# ADDITIONAL ITEMS

(Supplied by Others)

The correct additional items are essential for structural stability, weatherproofing and precise detailing, ensuring the cladding performs as intended.

- Flashings around windows, doors, interstory junction etc
- Fixings for installing the battens on to the structure (suitable type of fixing for the structure and battens used)
- Screws for fixing the battens together (suitable type of screw for the location and battens used)
- Sikaflex 11FC adhesive
- Suitable H3.2 treated timber cavity battens



# PREPARATION



ISSUE 2025.Q2 [33]



Proper preparation is vital for a successful installation, ensuring effective drainage, correct cavity batten layout, and precise board joins to enhance durability and maintain the cladding's natural appearance.



6.1	Cavity Batten Layout	34
6.2	Fixings	
6.3	Base to Wall (Concrete Floor)	38
6.4	Windows and Soffits	41

### CAVITY BATTEN LAYOUT

The time and care taken on setting and fixing the support system correctly will be reflected in the finished result. Time spent ensuring corners are upright and battens are straight will allow easier and faster installation and achieve a superior finished result.

Suitable H3.2 treated timber battens can be used as the cavity battens for the cladding boards. All cavity battens and details should comply with B2/AS1 as per E2/AS1 9.1.8.4. The cavity battens should be a minimum size of 18mm thick & 45mm wide, castellated cavity battens are shown throughout this guide. If standard non-castellated battens are used, there needs to be vertical battens fixed to the building with horizontal cross battens structurally fixed to these at the appropriate centres.

The battens need to be fixed into either the main framework of the building structure or to the noggins at centres suitable for the battens. Where there is cladding up into a gable end, there should be solid battens that run up the diagonals to support the ends of the boards. If using cross battens, ensure that these don't block the drainage cavity but allow enough support for the ends of the boards to be fixed to.

The battens at the top and bottom of the window/doors should be so that the board ends are supported; all horizontal battens should be level.

The Envello Perforated closure is suitable for batten sizes of 20 or 45mm, if battens used are different to these sizes, then perforated closures or flymesh sourced by other suppliers should be used. It is best for the perforated closure to be held between the back of the battens and the wall. This should be taken into consideration when fixing the battens, alternatively they can be fixed to the front of the battens using the 20mm accessory fixings.

Determine at what height the cladding is to start at. The bottom of the cladding boards should have sufficient clearances from other surfaces and should be in accordance with E2/AS1.

- A minimum clearance of 175mm above unpaved ground and 100mm above paved ground.
- Cladding must overlap the bottom plate by 50mm.
- Cladding above deck must have a 35mm gap.
- Decking running into cladding must have a 12mm standoff.
- Use a laser line or level, mark up a level line around the building or along the wall that
  is to be clad. This line will be the bottom of the first board.


Battens should be fixed to the structural wall using suitable external grade fixings.

- For fixing to a timber frame, the battens should preferably be fixed into the timber studs of the frame or into the noggins/dwangs.
- The battens should be fixed level and packers may be needed for these if the wall is undulating.
- Batten spacing at the bottom of the wall must have 2 cavity battens spaced 200mm apart, to ensure the cladding is properly supported.

	_
PRODUCT	Shadow Line+
CAVITY BATTEN SPACING	400mm
CAVITY BATTEN SPACING FOR HIGH LOAD AREAS	400mm


ISSUE 2025.Q3 [35]


### BATTEN LAYOUT

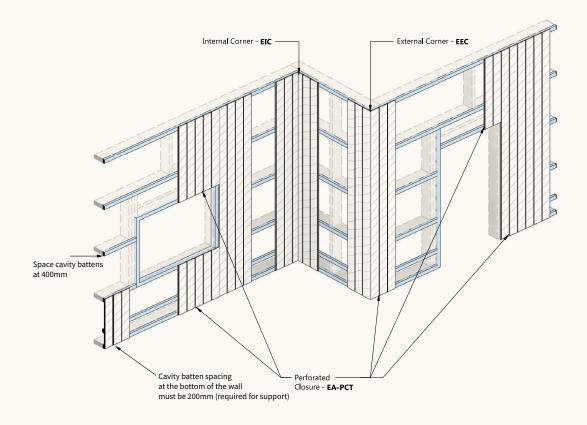

#### BATTEN LAYOUT AT GABLE END

#### BATTEN LAYOUT AROUND OPENING

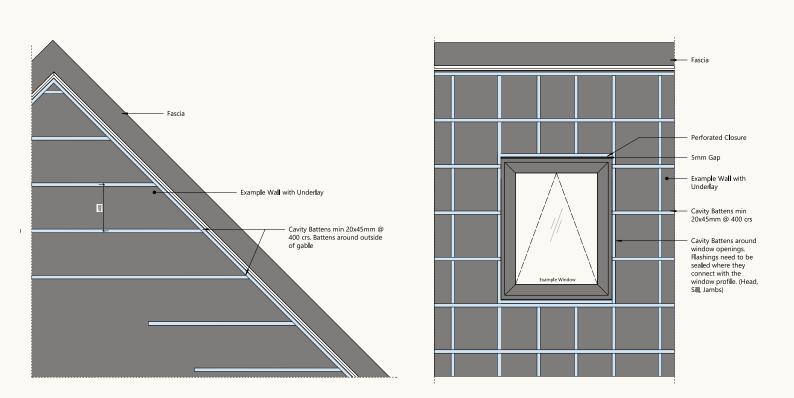

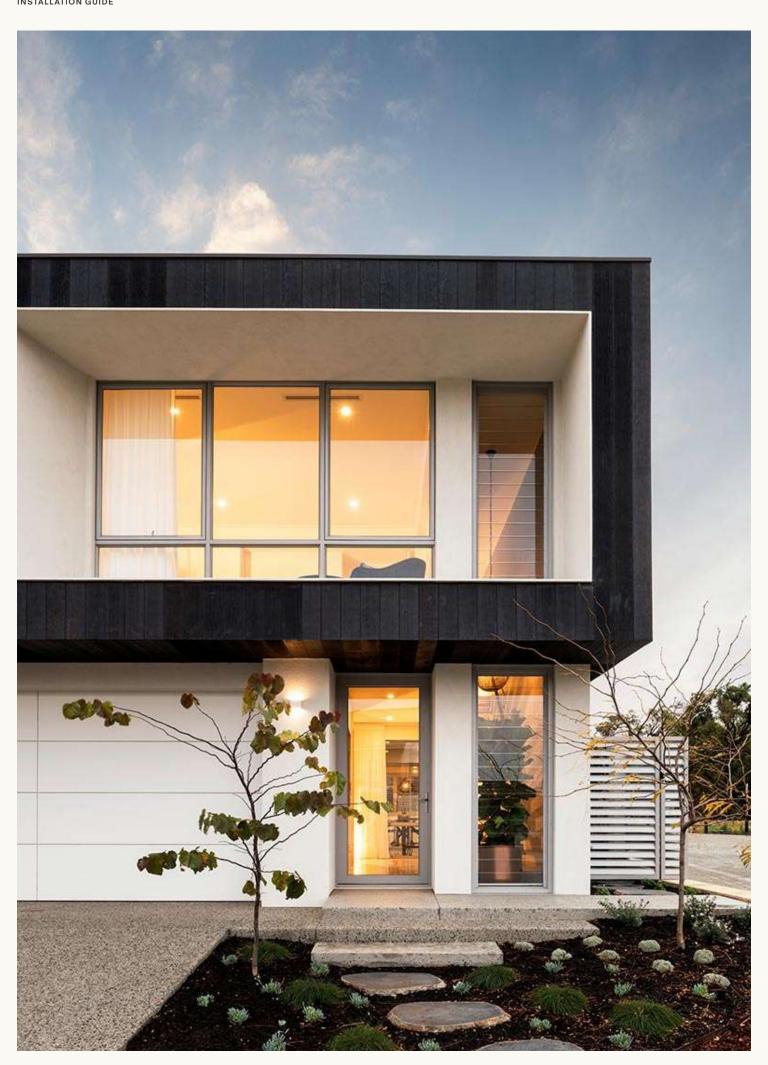

ISSUE 2025.Q3 [37]

## 6.2

## FIXINGS

Correct fixing of Envello cladding ensures secure installation and alignment. Boards are fixed through the tongue, with facefixing required around openings and edges for a neat, stable finish. Envello cladding boards must be fixed through the tongue with  $4.2 \times 75 \text{mm}$  cladding fixings. There should be one fixing per batten intersection and two per batten when joining boards. The fixings should be inserted through the fixing guide groove on the tongue and angled towards the board slightly with the head sitting flush with the surface. The fixings do not need to be predrilled or countersunk as the boards will naturally allow the head to slightly countersink. Once the first board has been installed, the second board can be installed beside it, with the groove covering the tongue of the previous board.

It is recommended to check the boards against a level every fourth or fifth board to ensure that the boards are aligned vertically. Adjustments to the spacing between the boards may be required.

When the tongue is taken off the boards to fit around windows and doors, or at the edge of a building, 40mm coloured head screws will need to be used through the board face.



Drainage cavity for the control of moisture is a key element in the design and construction of cladding. It is a requirement (as per NZBC E2 3.5) not an option and should not be overlooked.


# BASE TO WALL (CONCRETE FLOOR)

An 18mm minimum open cavity should always be provided behind the cladding and to dissipate any condensation or drainage at the bottom.

Cavity closures should always be used to create drained and vented cavities. Where possible, ventilation pathways for cavities should be provided at the bottom of the cavity and above the window head.


Insect and rodent invasion should also be considered, and a perforated closure should be used to counter these threats where there is the required air gap, whilst still maintaining the required air flow.


#### BASE TO WALL - GROUND LEVEL

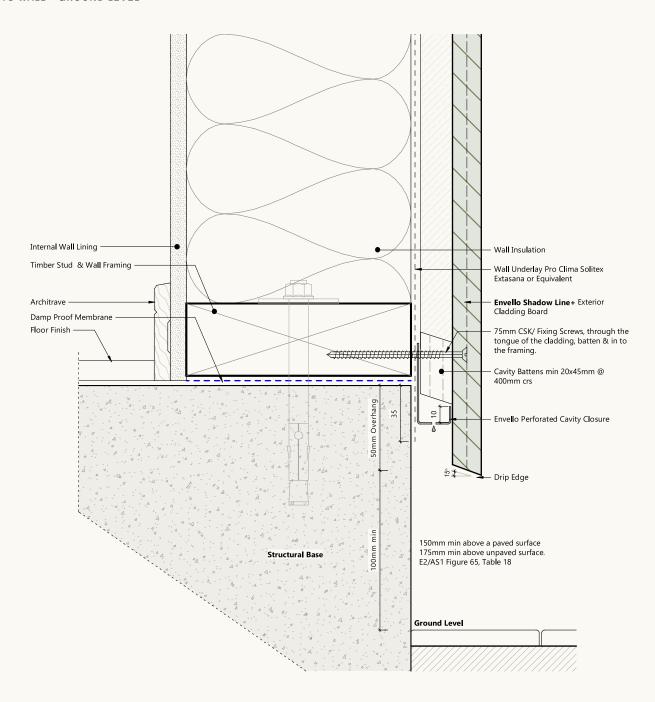

ISSUE 2025.Q3 [39]

#### BASE TO WALL - ENCLOSED DECK

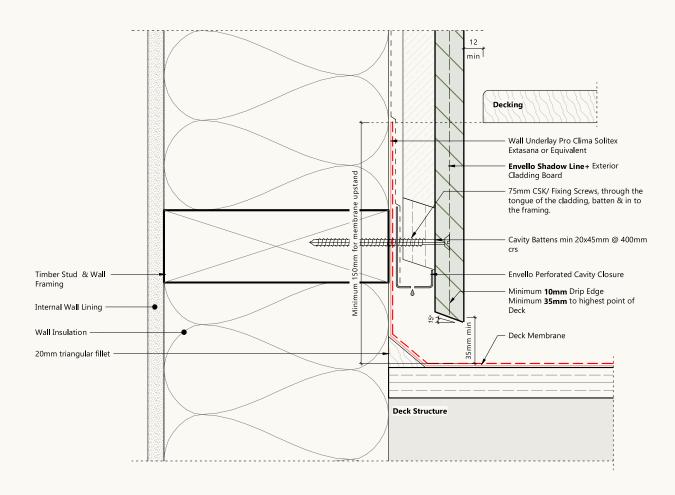


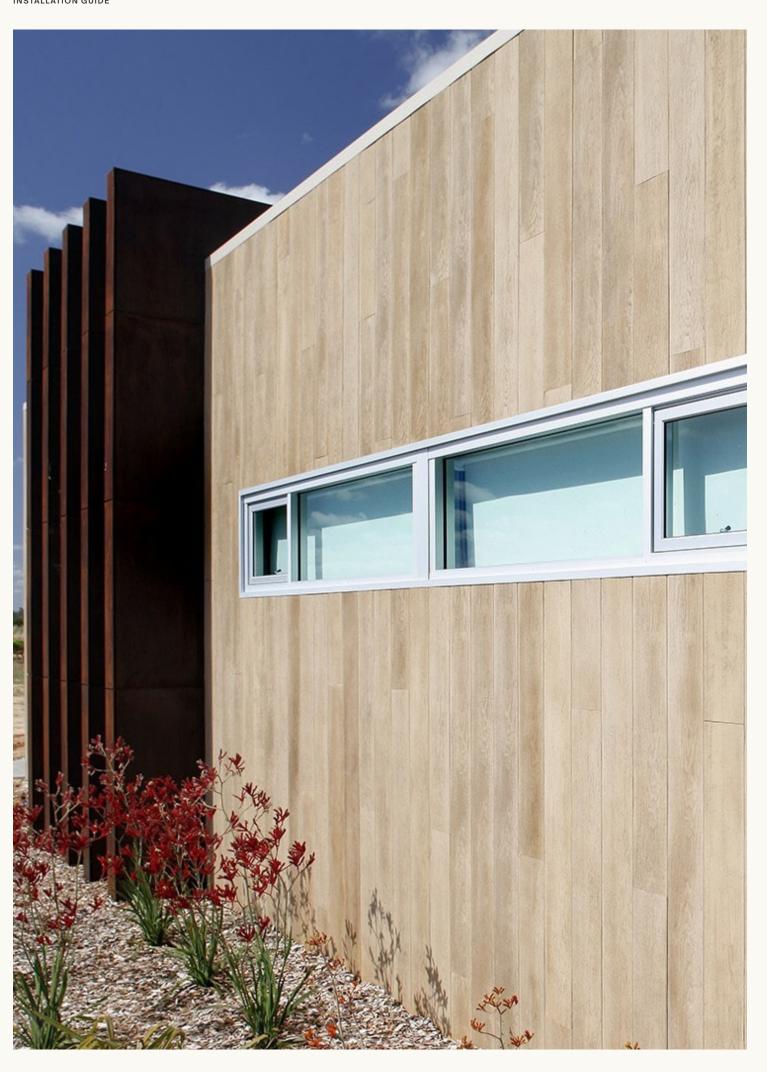


ISSUE 2025.Q3 [41]

# 6.4 SOFFITS

WALL HEAD

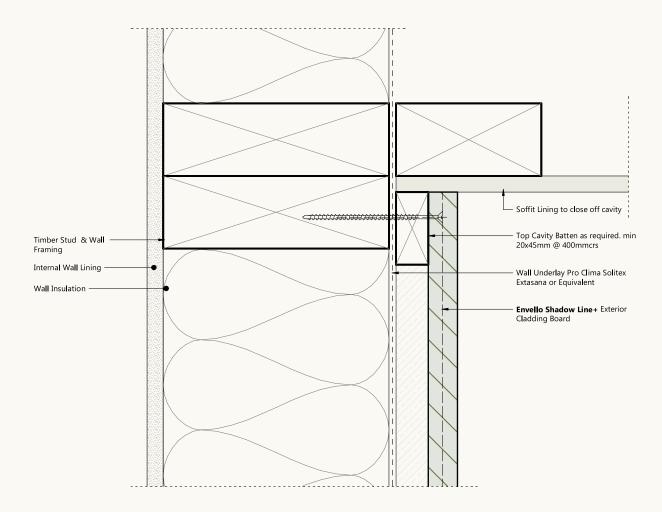

# INSTALLATION

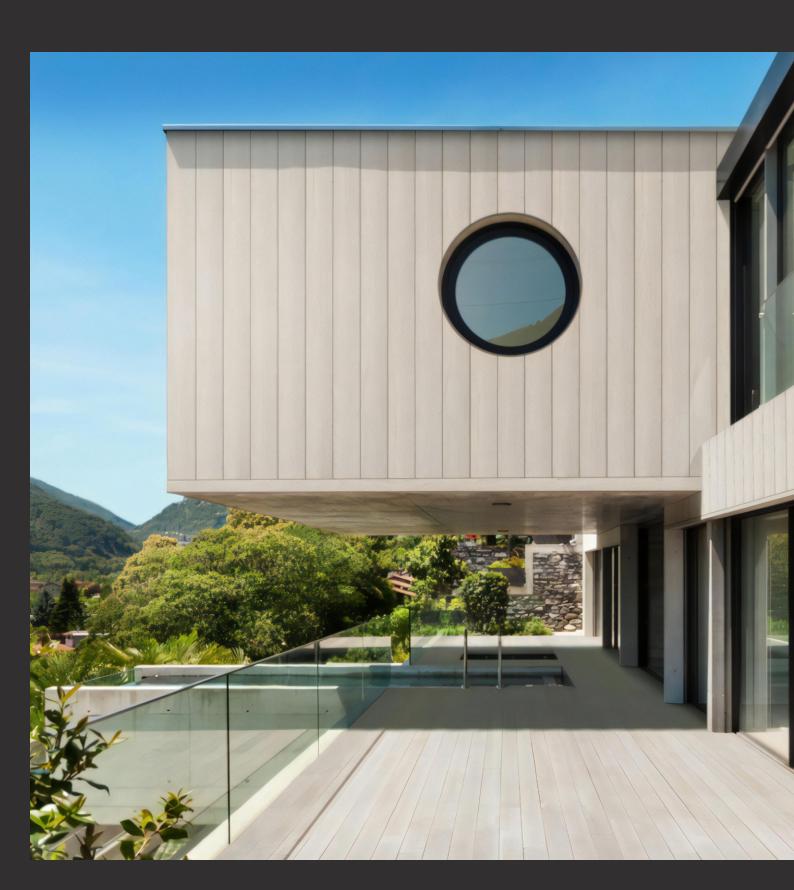

ISSUE 2025.Q2 [43]



Successful cladding installation involves attention to finishing details to ensure a durable, weather-resistant result that enhances both performance and visual appeal.

7.1	Corners	44
7.2	Inter Story Junction	48
7.3	Joining Boards	49
7.4	Windows and Doors	50
7.5	Wall Penetrations	53
7.6	Installation Abutting Rendered Surface	56
7.7	Barge Detail	57
7.8	Parapets	58
7.9	Transition to Brick/Monolithic	59

# CORNER DETAILING


Envello Shadow Line+ External Corner Profiles

#### SHADOW LINE+ EXTERNAL Y FLASHING

 $\label{thm:condition} \textbf{The External Y Flashing is designed to create a clean, seamless, mitred finish on external corners.}$ 


When installing the Y Flashings, ensure:

- Flashing is fixed with 20mm screws at 300mm centres on both sides of the Flashing.
- For multi-storey installations, overlap the upper flashing by 20mm over the lower, securing both sides of the flashing with 20mm screws for a neat, continuous detail.
- Ensure either side of the flashing is sealed using a continuous bead of Sikaflex FC11 sealant.

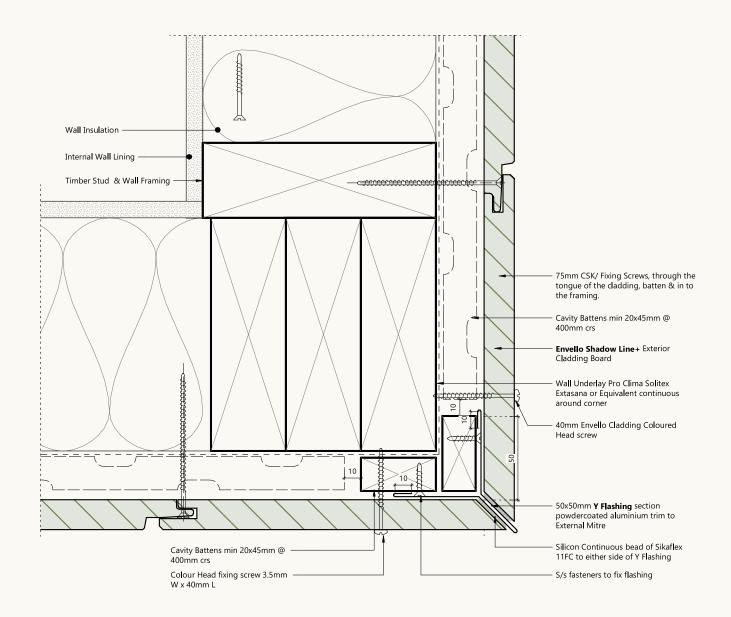

ISSUE 2025.Q3 [45]

#### **ENVELLO SHADOWLINE + EXTERNAL CORNER PROFILE**

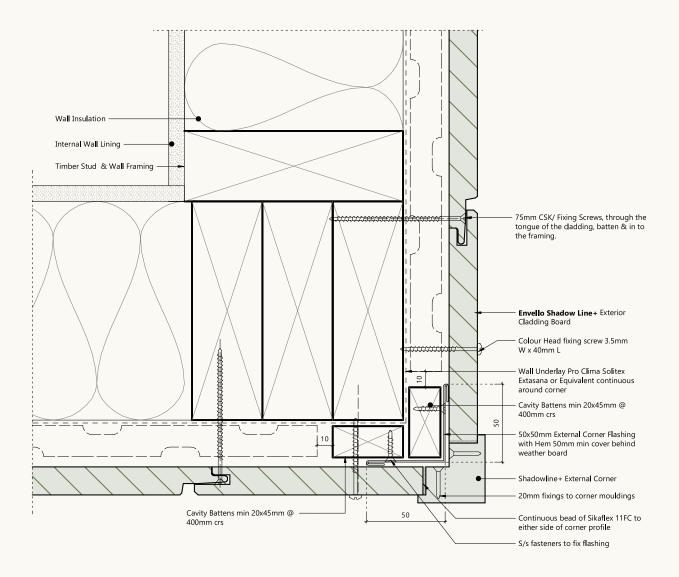

#### PERFORATED CLOSURES

Perforated closures are secured to the back of the corner profiles with accessory fixings, then fixed to the corner battens, ensuring stability and proper ventilation at the junction.

The perforated closure is fitted to the back of the corner profiles using the 20mm accessory fixings at 200mm centres. These are then fixed to the battens on the corner, as shown in Fig. 8-10.

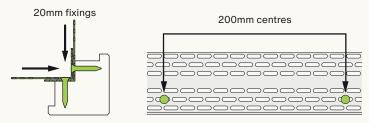


Fig. 8 - Use of perforated closure on corner profiles


#### **Internal Corner Profile**

#### INTERNAL BUTT JOINT

Internal corners can be finished by simply butting boards together.


Alternatively, the boards can be butted together on internal corner.

The boards can also be mitred to create the external corner, this would also be applicable if the corner is anything other than 90 degrees.

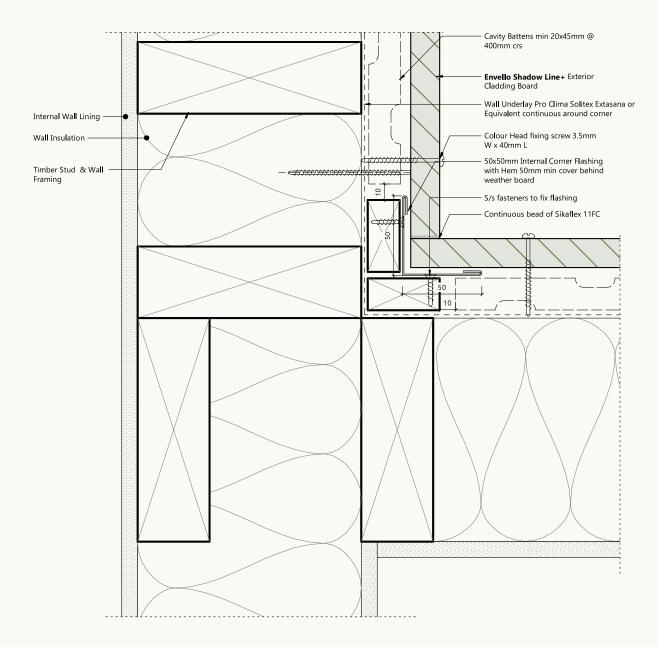

ISSUE 2025.Q3 [47]

#### SHADOW LINE+ INTERNAL CORNER PROFILE

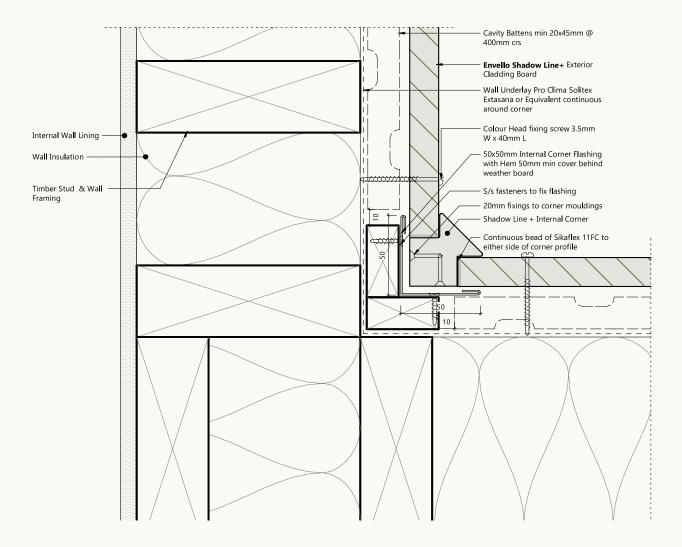

#### PERFORATED CLOSURES

Perforated closures are secured to the back of the corner profiles with accessory fixings, then fixed to the corner battens, ensuring stability and proper ventilation at the junction.

The perforated closure is fitted to the back of the corner profiles using the 20mm accessory fixings at 200mm centres. These are then fixed to the battens on the corner, as shown in Fig. 8.


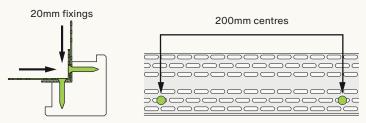


Fig. 8 - Use of perforated closure on corner profiles

# INTER-STOREY CAVITY JUNCTION

Horizontal cladding joints require a flashing detail to allow for building movement, protecting the boards and ensuring long-term stability of the Envello cladding system. When there is a horizontal joint between cladding areas, a flashing detail should be used to ensure boards aren't affected by any building movement. As Envello cladding is made from a resin mineral composition, it is more stable in comparison to timber or resin mineral board based on timber, and therefore acceptable movement is up to 0.2%.

#### HORIZONTAL JOINT

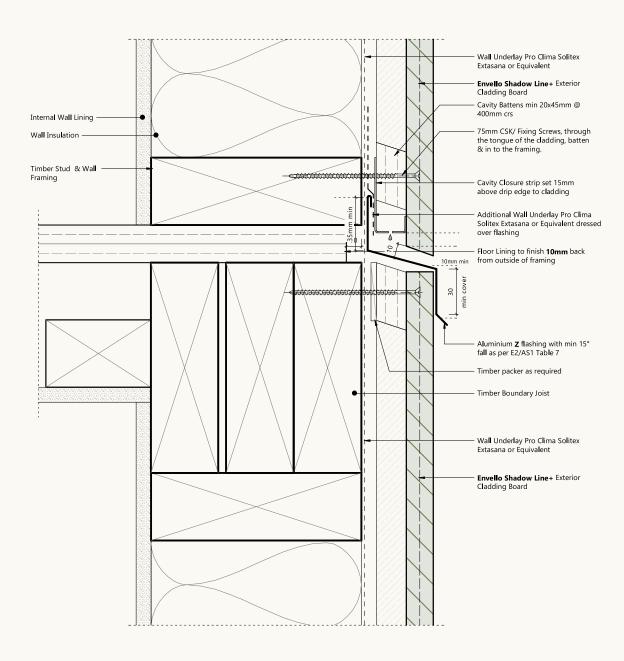

ISSUE 2025.Q3 [49]

# 7.3

### JOINING BOARDS


End-to-end board joins must be properly supported, staggered across the wall, and sealed for stability and a seamless appearance. Careful preparation ensures alignment and long-term performance.

When joining boards end-to-end, a batten must be used behind the boards to ensure both ends are supported equally. It is best to not have the joins all in one line, rather spread out across the cladding area.

As the boards are manufactured through a moulding process, we recommend all ends are trimmed before they are installed. Dry fit the boards first to make sure they align, using boards that are of appropriate dimensions to ensure a consistent finish.

We recommend that the boards are joined with a  $20^{\circ}$  scarf joint with one overlapping the other. The cut ends should be painted with touch-up coating for the best finish and Sikaflex 11FC sealant applied to the join.

**BOARD JOIN** 

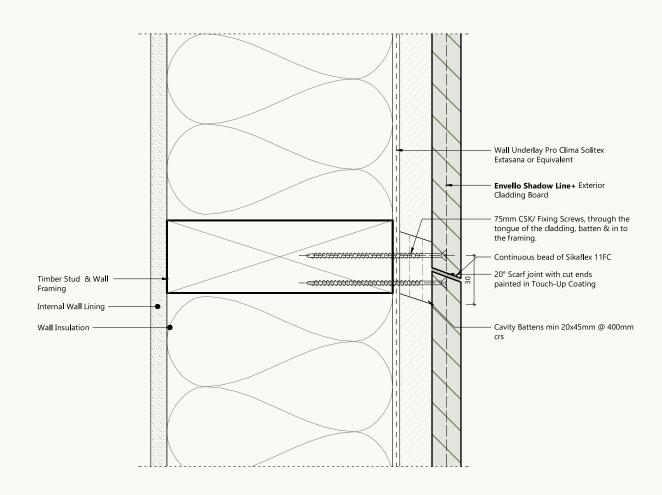


### WINDOWS AND DOORS

Flashings must be correctly specified and installed to suit the cladding depth and joinery. Sourced from specialist suppliers, they ensure effective water management and compliance with NZBC E2/AS1.

Flashing trims around windows and doors will need to be sourced from other suppliers (e.g. the window manufacturer or flashing manufacturer). They should be designed to work with the window or door joinery as well as the depth of cladding and battens used. All flashings must be of sufficient grading and should be installed in accordance with NZ/AS1.


Other details that require flashings will also need to be sourced from other suppliers, such as the flashings around a meter box or inter-storey joining details. The flashings shown throughout this guide are indicative and need to be confirmed by the manufacturer.

WINDOW HEAD - STARKE AMBIANCE

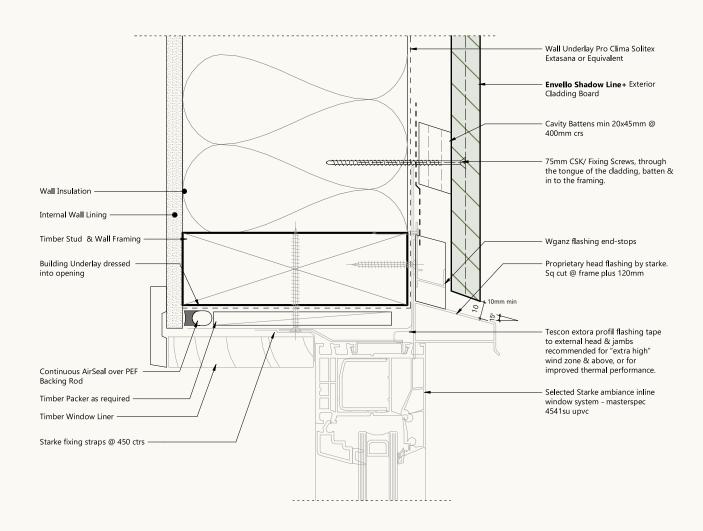


ISSUE 2025.Q3 [51]

#### WINDOW JAMB - STARKE AMBIANCE

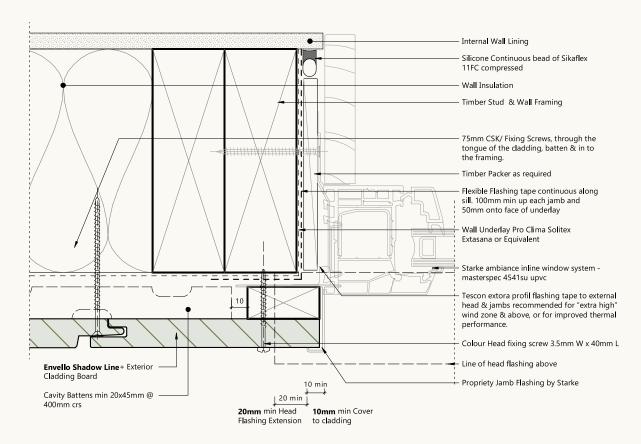

#### WINDOW SILL - STARKE AMBIANCE

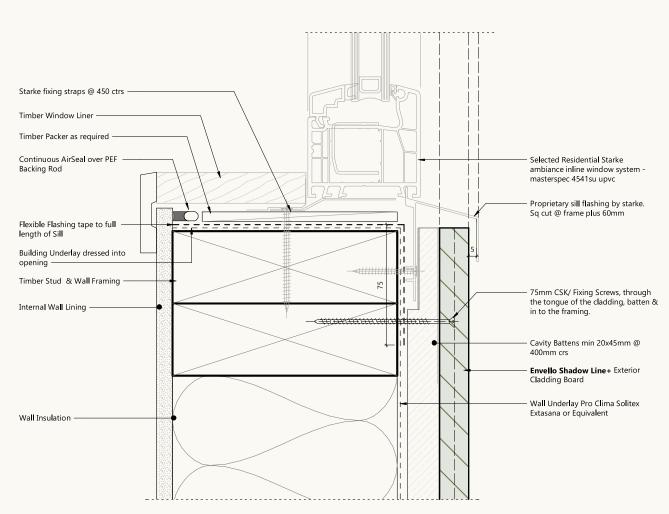



ISSUE 2025.Q3 [53]

## 7.5

# WALL PENETRATIONS


Careful detailing around penetrations and parapets is essential to maintain water tightness, ensure structural fixing, and protect the cladding's integrity in all weather conditions. When installing around a metre box or other penetrations, the flashing detail must ensure a water and airtight seal whilst also allowing fixing points for the cladding boards. The cladding should be detailed so that the sealing around the meter box is not affected. Please note that the images shown are indicative and should be confirmed by the flashing manufacturer.

When installing cladding around pipes, please ensure the pipes are sufficiently sealed with backing rod and sealant, and that the cladding fixing doesn't affect the performance.


Where there is a parapet wall, the flashing on the parapet wall should be sealed and designed so that it allows for sufficient water runoff. The flashing needs to cover the cladding sufficiently for the wind zone according to NZBC E2/AS1.

Please note that anything that is fixed to the face of the cladding boards should not rely on the boards to be secure. The fixings should be fixed either into the structurally fixed battens or into the building structure, depending on the likely loads applied. If items are being fixed through the boards into the building structure, sufficient packing should be inserted behind the boards to help prevent any board deformation.


#### PIPE PENETRATIONS

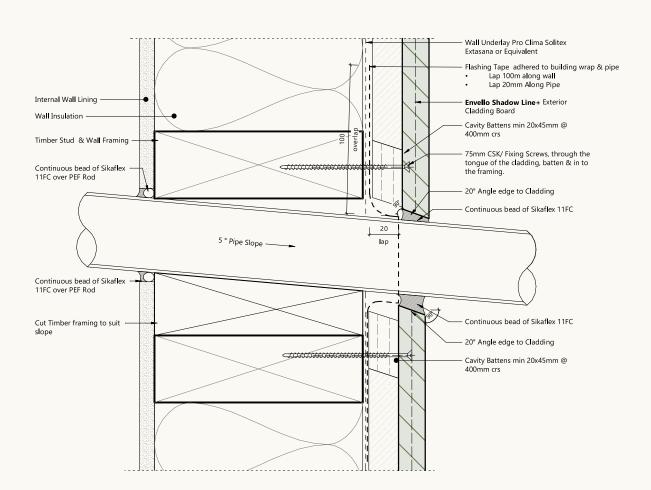

#### METER BOX HEAD

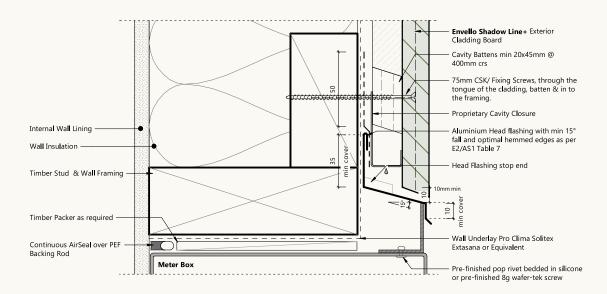


#### METER BOX SILL

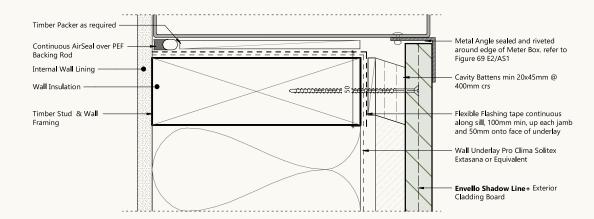

ISSUE 2025.Q3 [55]

#### METER BOX JAMB

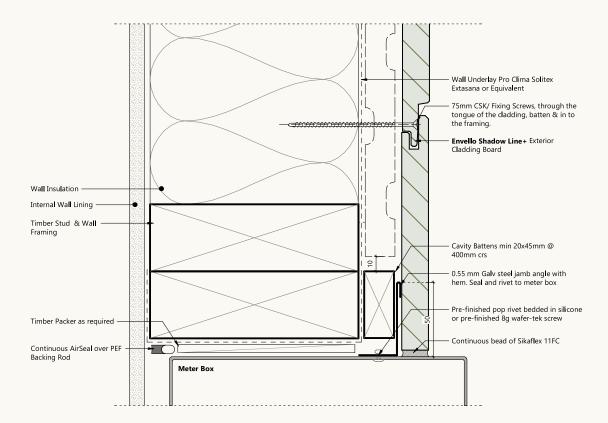


# INSTALLATION ABUTTING RENDERED SURFACE

When installing Envello cladding next to render, allow for movement and water runoff using recommended gaps, sealants, corner profiles, and flashing for a weather-tight, professional finish. The junction between Envello and render can be achieved in a number of different ways, however we'd recommend finishing the render up to a render stop bead rather than directly up to the cladding, before fitting the Envello cladding.

Please ensure a 5mm gap is left between the render stop and the edge of the cladding / corner profiles to allow for a backing rod and silicone sealant to be used. The junction between the Shadow Line+ boards and render on a corner can be done utilising corner profiles or reveal boards.

When installing cladding above the render, it is best to install a flashing detail that goes up behind the cladding battens and protrudes further than the render, to allow rainwater to run off the flashing detail.


#### **EXTERNAL CORNER ABUTTING RENDER**

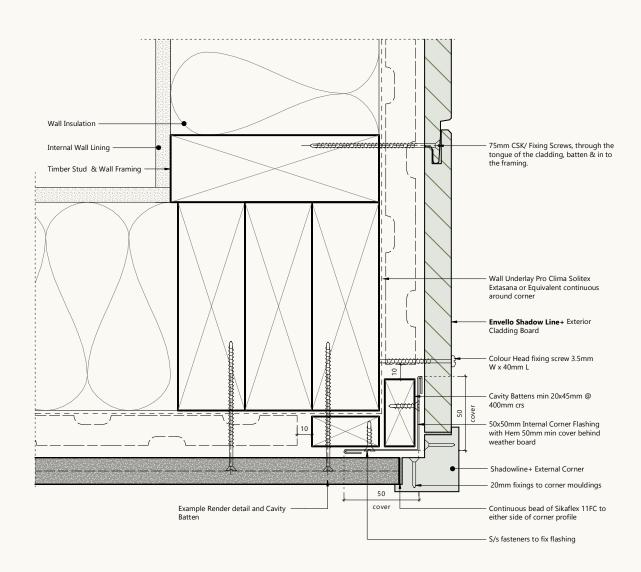

ISSUE 2025.Q3 [57]

# 7.7

# BARGE DETAIL

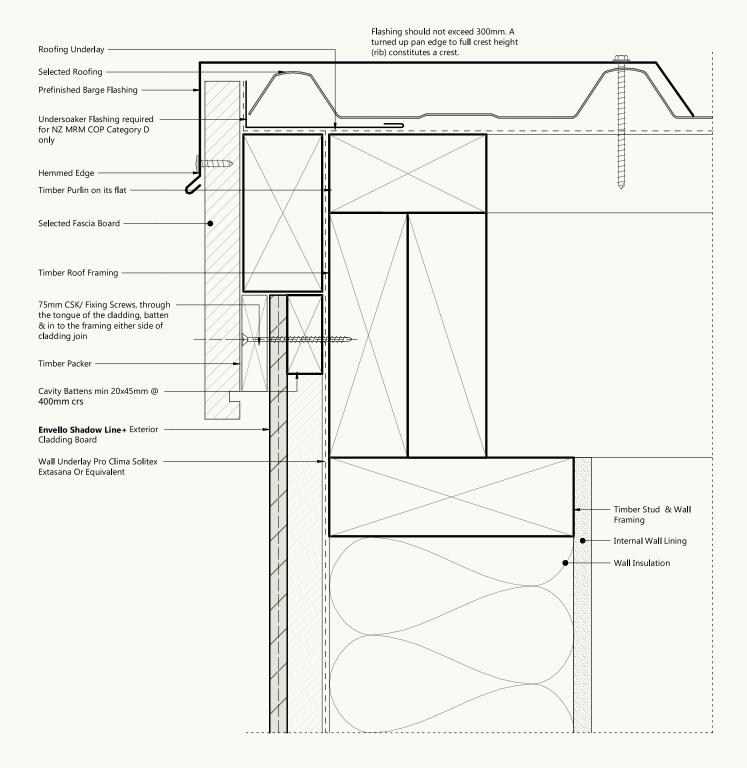

## PARAPETS


Parapet junctions must incorporate compliant flashings, ensuring adequate coverage and water deflection in accordance with wind zone requirements and E2/AS1.

Where there is a parapet wall, a flashing is to be detailed to allow for sufficient water run-off and to be sealed.

The flashing needs to sufficiently cover the cladding for the wind zone requirements of the property.

- As per E2/AS1 6.4 & Figure 10.
- Parapet to wall junctions are to be flashed to direct water clear of the outside of face of the cladding.

#### PARAPET FLASHING

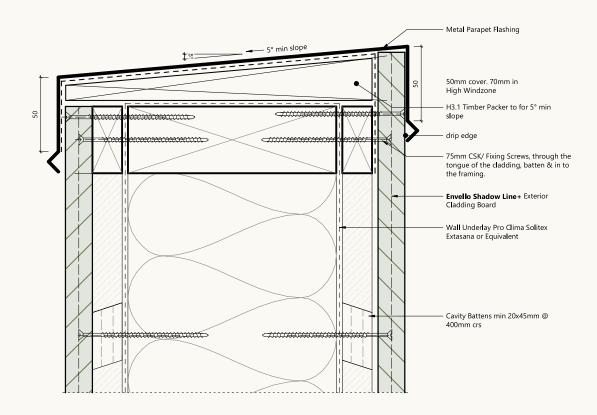

ISSUE 2025.Q3 [59]

# 7.9

When transitioning from Envello cladding to brick or monolithic cladding, a small gap and some finishing are required for a clean, sealed look.

# TRANSITION TO BRICK/MONOLITHIC

A 5mm gap should be left between the Envello cladding and the adjoining surface to accommodate a backing rod and SikaFlex 11 FC, ensuring a proper seal. The cut end of the board should also be painted with a touch-up coating to maintain a consistent colour finish – this is purely for aesthetic purposes.



# Horté