



# LIGHT FEATURE PLANK SPECIFICATION SHEET

Moda Collection engineered T&G plank by Forté.  
15mm thick, 220mm wide, 2200mm length. Direct stick  
installation method onto substrate. Light feature grade,  
prefinished with UV cured NatureMatte lacquer.

## PRODUCT DETAILS

Collection	Moda
Product type	Engineered plank
Availability	Stocked
Total thickness	15mm
Width	220mm
Length	2200mm
% of shorts	Up to 25%
Wear layer	4mm solid european oak
Core	Eucalyptus plywood
Backing layer	Birch
Construction	Multilayer engineered
Re-sands	Up to 2 (approx. 1mm removed per re-sand)
Surface texture	Brushed
Surface sheen	Gloss 3-5%
Bevel	Micro bevel 4 sides
Status	Prefinished (no additional coats required)
Finish	UV cured NatureMatte lacquer
Species	European oak
Wood grade	Light feature (refer page 2 for details)
Filler colour	Colour dependent

The Moda Collection is also available in: light feature plank,  
herringbone pattern and stair nosing

## STRUCTURAL WARRANTY

10 year commercial	For terms and conditions see
25 year residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>



Capri



Sorrento



Mondello

## INSTALLATION

Installation method	Glue down (double stick for multi-level)
Suitable substrates	Plywood, particle board, concrete, existing timber - enquire for others
Joint profile	Tongue and groove (4 sides)
Suitable applications	Flooring, walls, ceilings
Suitable uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor heating	• Hydronic systems • Electric systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet area suitability	Contact the Forté team for information 0508 35 66 77

## TECHNICAL SPECIFICATIONS


Reaction to fire (floors)	Critical Flux 5.0kw/m <sup>2</sup>
Reaction to fire (walls and ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
Wear layer density	700kg/m <sup>3</sup>
<u>Formaldehyde emission</u> AS/NZS 2098.11	E0 (0.1mg/L) Low VOC, no added formaldehyde
<u>Slip ratings</u> AS/NZS 4586 Wet test AS/NZS 4586 Dry test	Classification F, Mean COF 0.60 Classification X, Pendulum Mean 43 BPN

## PACK INFORMATION

Pack size	2.904m <sup>2</sup>
Pack weight	30.51kg
Pieces per pack	4 full + 2 split or 5 full + 1 split

# Plank Profile

## MODA PLANK

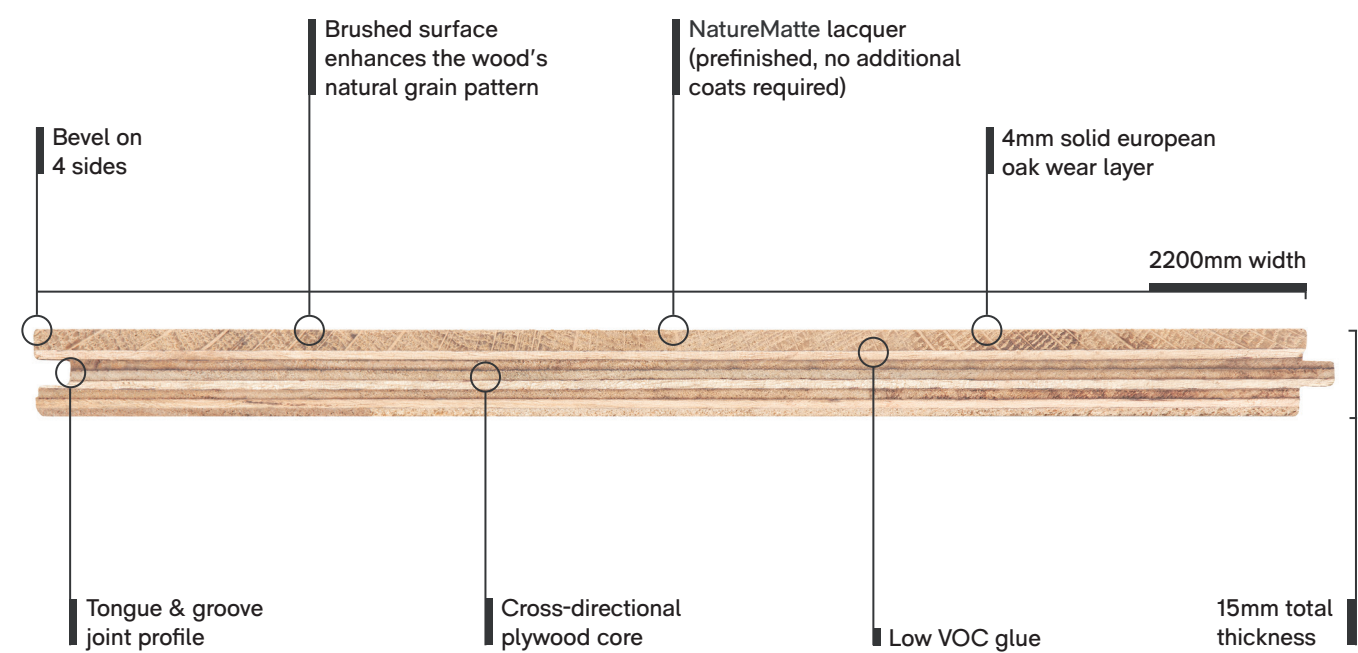

## MODA – FEATURE GRADE



A Moda Light Feature grade plank will consist of colour variation. You may see minimal sapwood throughout the planks as well as smaller and less frequent knots. Some small cracks and checks will be present and are finished with a dark shade of filler.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's product specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## MODA 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Moda Collection comes with a full 25 year residential structural warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## MODA 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Moda Collection comes with a full 10 year commercial structural warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE MODA COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté installation guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/Installation](http://www.forte.co.nz/Installation)