

HERRINGBONE FEATURE SPECIFICATION SHEET

Moda Altro Collection Engineered T&G Herringbone plank by Forté. 15mm thick, 138mm wide, in 690mm lengths. Glue Down installation method onto substrate. Feature grade, pre-finished with NatureMatte Lacquer.

PRODUCT DETAILS

Collection	Moda Altro
Product Type	Engineered Herringbone Plank
Availability	Stocked
Total Thickness	15mm
Width	138mm
Length	690mm
Wear Layer	4mm Solid European Oak
Core	Hevea
Backing	Spruce Veneer
Construction	3-layer Engineered
Re-sands	Up to 2 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Extra Matte (4-6%)
Bevel	Micro bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	NatureMatte Lacquer (7 coats)
Species	European Oak
Wood Grade	Feature (refer page 2 for details)
Filler Colour	Dark


The Moda Altro Collection is also available in: 220mm plank, herringbone light feature grade (selected colours) and stair nosing

STRUCTURAL WARRANTY


10 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties

SUSTAINABILITY


PEFC® Certified



Mondello



Verona



Dolcedo

INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	<ul style="list-style-type: none"> Hydronic Systems Electric Systems set in screed (ensure screed suitable for UFH) -
Wet Area Suitability	enquire for others Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS



Reaction to Fire (Floors)	Critical Flux 5.0kw/m ²
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
Wear Layer Density	700kg/m ³
Formaldehyde Emission	
AS/NZS 2098.11	E0 (0.1mg/L) Low VOC, No added Formaldehyde
Slip Ratings	
AS/NZS 4586 Wet Test	Classification F, Mean COF 0.60
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 43 BPN

PACK INFORMATION

Pack Size	0.571m ²
Pieces per pack	3 x left + 3 x right
Pack Weight	5.5kg

Herringbone Profile

MODA ALTRO HERRINGBONE

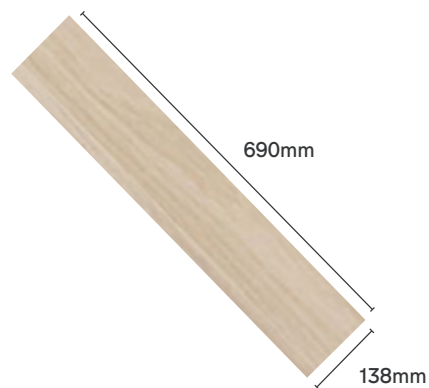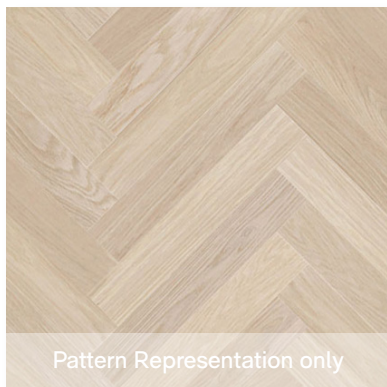

Plank is tongue and groove on all four sides. Product supplied in right and left planks.

MODA ALTRO – FEATURE GRADE



A Moda Altro Feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

MODA ALTRO 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

MODA ALTRO 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE MODA ALTRO COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda Altro timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation