



HERRINGBONE SPECIFICATION SHEET

Villa Collection Engineered T&G herringbone by Forté. 18mm thick, 120mm wide, 600mm length. Glue Down installation method onto substrate. Rough Sawn, rustic grade surface, pre-finished with UV Cured Matte Lacquer.

PRODUCT DETAILS

Collection	Villa
Product Type	Herringbone
Availability	Custom Order
Total Thickness	18mm
Width	120mm
Length	600mm
Wear Layer	4mm Solid European Oak
Core	Meranti Plywood
Backing Layer	Meranti Veneer
Construction	3-layer Engineered
Re-sands	1-2 (approx. 1mm removed per re-sand)
Surface Texture	Rough Sawn & Brushed
Surface Sheen	Matte (8%)
Edge Style	Distressed and micro bevelled 4 sides (0.7mm)
Status	Pre-finished
Finish	(no additional coats required)
Species	UV Cured Matte Lacquer (7 coats)
Wood Grade	European Oak
Filler Colour	Rustic (refer page 2 for details) Dark

The Villa Collection is also available in: 240mm plank and matching stair nosings

STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties

Images are colour representation only



Cashmere




Limestone



Dune



Russet



Raven

INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (1 tongue + 3 grooves. Loose tongue provided)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 2.2kw/m ²
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
Wear Layer Density	720kg/m ³
Thermal Resistance	0.17 m ² K/W
Formaldehyde Emission	
AS/NZS 2098.11	E0 (0.1mg/L) Low VOC, No added Formaldehyde
Slip Ratings	
AS/NZS 4586 Wet Test	Classification F, Mean COF 0.70
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 40 BPN

PACK INFORMATION

Pack Size	0.72m ²
Pack Weight	8.80kg
Pieces per pack	10

Plank Profile

VILLA PLANK

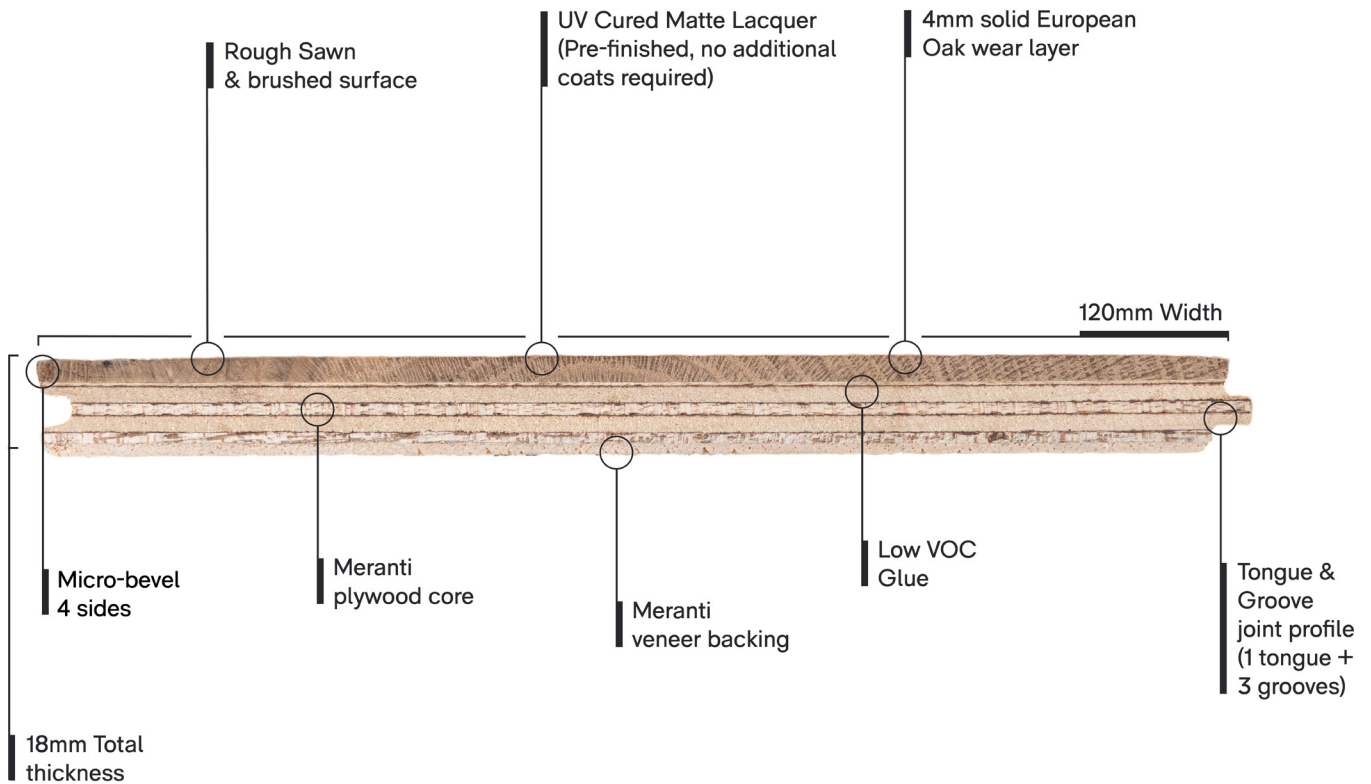

VILLA – RUSTIC GRADE



A Villa rustic grade plank will typically contain unlimited natural colour variation. This grade allows for more frequent, larger knots and more sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

VILLA 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Villa Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

VILLA 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Villa Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE VILLA COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Villa timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation