



FEATURE PLANK SPECIFICATION SHEET

Indus Collection Engineered T&G plank by Forté. 18mm thick, 240mm wide, 2400mm length. Glue down installation method onto substrate. Feature grade, pre-finished with UV Cured Matte Lacquer.

PRODUCT DETAILS

Collection	Indus
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	18mm
Width	240mm
Length	2400mm
% of Shorts	Up to 25%
Wear Layer	4mm Solid European Oak
Core	Meranti Plywood
Backing	Meranti Veneer
Construction	Multi-layer Engineered
Re-sands	Up to 2 (approx. 1mm removed per re-sand)
Surface Texture	Lightly Brushed
Surface Sheen	Matte (8%)
Bevel	Micro-bevel 4 sides (0.7mm)
Status	Pre-finished (no additional coats required)
Finish	UV Cured Matte Lacquer (6 coats)
Species	European Oak
Wood Grade	Feature (refer page 2 for details)
Filler Colour	Dependant on colour, visit forte.co.nz for accurate filler colour

The Indus Collection is also available in matching stair nosings, herringbone and selected prime colours.

STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties



Mojave


Atacama

Kharan

Sahara



Colorado



Patagonia



Tanami

SUSTAINABILITY

Sustainably Sourced | FSC® available on request
Low VOC | No added Formaldehyde

INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 2.2kw/m ²
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
Wear Layer Density	720kg/m ³
Thermal Resistance	0.17 m ² K/W
<u>Formaldehyde Emission</u>	
AS/NZS 2098.11	E0 (0.1mg/L)
<u>Slip Ratings</u>	
AS/NZS 4586 Wet Test	Classification F, Mean COF 0.70
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 40 BPN

PACK INFORMATION

Pack Size	2.304m ²
Pack Weight	27.80kg
Pieces per pack	3 full planks + 1 split plank

Plank Profile

INDUS PLANK

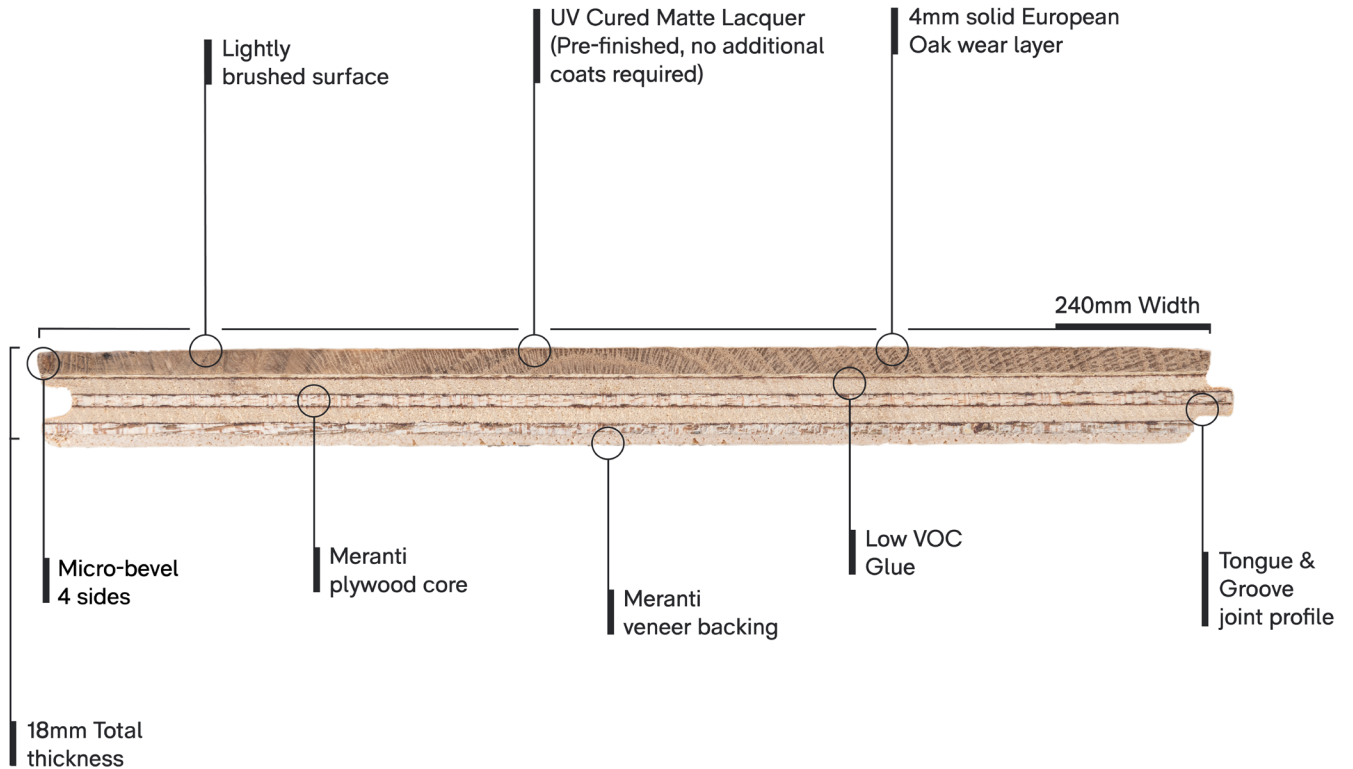

INDUS – FEATURE GRADE



An Indus feature grade plank will typically contain unlimited natural colour variation. This grade allows for more frequent, larger knots and more sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

INDUS 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Indus Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

INDUS 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Indus Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE INDUS COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Indus timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation