

# Nature Refined

A unique collection of timber  
products from around the globe

Timber Flooring  
Millboard Decking  
Wall Panelling  
Ceiling Coverings

Spring — Summer  
2018 / 19

**forté**  
— Timber Interiors

# forté

## Showrooms

Queenstown





Welcoming and collaborative spaces for residential & commercial design inspiration.  
Over 100 options for timber interiors & decking on display.  
Free samples available to take away.

Auckland



# contents.

- 2 trend report | your 2018/19 guide to timber interiors
- 5 sort by range | what ranges do forté offer?
- 11 sort by colour | what colours do forté have?

## 21 timber flooring

- 23 manor collection | luxury french oak
  - 24 – atelier | 19 & 15mm luxury french oak
  - 28 – classique | 15mm luxury french oak
  - 32 – rustique | 15mm luxury french oak
- 35 villa | 15mm rough-sawn european oak
- 39 urban plank | 14mm cost effective european oak
- 43 smartfloor | 15mm european oak
- 51 ultra | 21mm european oak
- 59 manor unfinished | 19 & 15mm unfinished french oak
- 63 pro-plank | 15mm unfinished european oak
- 72 imondi | 15 & 21mm reclaimed european oak

## 69 wall panelling

- 72 imondi plank | 15 & 21mm reclaimed luxury european oak or pine
- 75 imondi lamella | 4mm reclaimed solid veneers for wall panelling
- 77 tactile | 15mm rough-sawn european oak wall panelling

## 85 decking / outdoor flooring

- 86 millboard | premium wood-free decking
  - 86 – enhanced grain collection | 32mm decking with a light grain
  - 90 – weathered collection | 32mm decking with a heavy, rustic grain

- 94 accessories | cleaners, adhesives and floor prep
- 95 underlay
- 96 index / terms & conditions

## we re-plant what we use.

At Forté, we pride ourselves on being a sustainable company that has a positive impact on the environment.

This year, we planted 2,000 Oak trees in France, to minimise our carbon footprint. Read more at:  
[forteflooring.co.nz/environmental](http://forteflooring.co.nz/environmental)





#### **Forté Head Office / Warehouse**

3 Keith Place, Pukekohe,  
Auckland 2120, New Zealand

Monday-Friday: 7.30am-5pm  
0508 35 66 77

#### **Forté Auckland Showroom**

Evoque Interior Inspirations  
373 New North Road, Kingsland,  
Auckland 1021, New Zealand

Monday-Friday: 9am-5pm  
0800 00 23 00

[www.forteflooring.co.nz](http://www.forteflooring.co.nz)  
[info@forteflooring.co.nz](mailto:info@forteflooring.co.nz)

#### **Forté Queenstown Showroom**

313 Hawthorne Drive, Frankton,  
Queenstown 9300, New Zealand

Tuesday-Friday: 9am-5pm  
Saturday: 10am-3pm  
03 974 4312

#### **Forté Christchurch**

Monday-Friday: 7.30am-5pm  
03 423 9958

**New showroom location coming soon**

[instagram/forteflooringnz](https://www.instagram.com/forteflooringnz)  
[facebook/forteflooringnz](https://www.facebook.com/forteflooringnz)

## getting started.

#### **Get in touch or visit a showroom**

You can contact one of our product specialists via [forteflooring.co.nz](http://forteflooring.co.nz), by calling us on 0508 35 66 77, by emailing [info@forteflooring.co.nz](mailto:info@forteflooring.co.nz), or come and visit a colour consultant at one of our showrooms.

#### **Pick your profile and colour**

Things to consider when choosing your timber: width, texture, colour, style, thickness. Our team will help you decide on a product that is right for your project. Pick from our large range of pre-finished colours, or talk to our team if you require a specific custom colour to match your interior.

#### **Send us your project plans**


We can measure your floor plans or arrange a site measure to confirm the exact amount of flooring you will need.

#### **Samples and quote**

To make sure the product is exactly what you want, you can order samples via the website, phone, email, or visit one of our showrooms to see the planks in larger scale. Our team can send you a quote at any time.

#### **Wrap it up**

We will confirm stock availability and if stocked, we will place your order on hold or if an indent product, we will order from overseas. At the same time we will book the job in with one of our recommended installers.

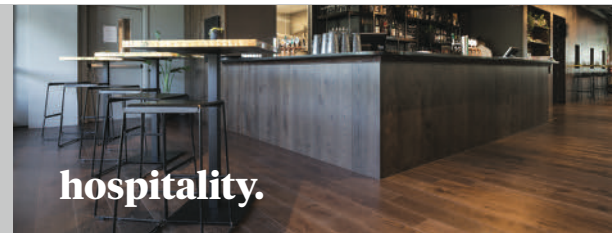

# back to natural.

We are seeing a strong shift from grey tones towards more natural colours in timber flooring; think caramel, fawn, beige, tan, taupe, ecru and more. Not only is the colour trend going natural but so are the finishes – say goodbye to shiny floors that show every mark, in 2019 it's all about matte, raw-look finishes that are not only good-looking but extremely low-maintenance.



smartfloor blond oak / p. 44



ultra bordeaux oak / p. 63

## making reclaimed affordable.

Reclaimed timber is full of character and history, some of which has been salvaged from old boats and barns from centuries ago. Because of this, many reclaimed timbers are in the higher price bracket, so we have introduced a cost-effective wall cladding option named Imondi Lamella. This range can be used as wall cladding, ceiling coverings, counter fronts etc. yet still remains 100% genuine and authentic. View the collection on page 75.



imondi pine raw lamella / p. 75



imondi oak grey plank / p. 73



## a touch of luxury.

A little bit extra can go a long way. Brass inlays, matte black finishing bars, inset stair treads, all of these finishing touches can take your interior to the next level and really give it that high-end feel. We are now supplying a range of brass trims in a variety of styles which can be used with most of our products. View our brass trims on page 25.



brass trim / manor atelier classic / p.25

trend report.

## all about the texture.


Gone are the days of silky smooth flooring and wall panelling, people love to see and feel different textures in interior spaces. Our products have been meticulously hand-scraped and brushed to enhance this textural element. Our new Villa collection features stunning 240mm wide planks with a skipped bandsawn effect, creating texture you can feel underfoot or on walls. View the Villa collection on page 35 or the tactile rough-sawn wall panelling on page 77.



tactile ebony / p. 79



villa cocoa / p. 37

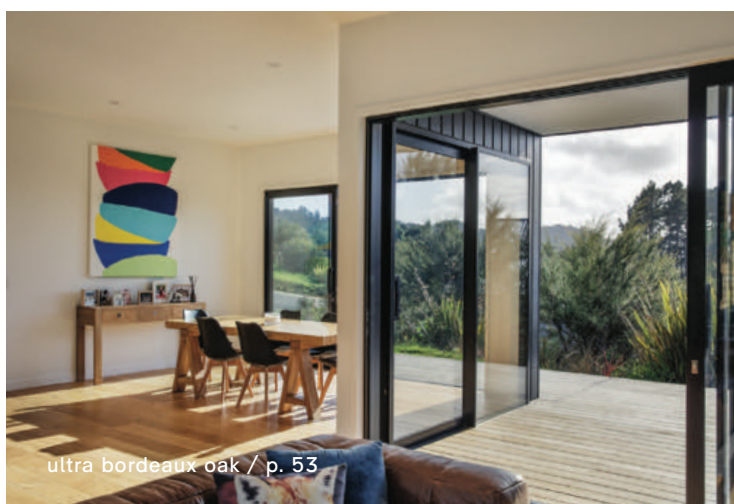

ultra bordeaux oak / p. 53

## indoor/outdoor transition.

We all want that seamless transition from indoor to out. The new premium Millboard decking range features an array of versatile colours that can be mixed and matched with our extensive timber collection to create that desired look. Whether you're looking for an exact match, or going for a distinct contrast, our colour consultants can help you find a combination that works. View the Millboard collection on page 86 & 91.



sort by **range.**



# timber flooring.

## Urban Plank | 14mm thick European Oak

Page 39

\$

Urban Plank engineered timber flooring features a 3mm solid European Oak wear layer, it is a great alternative to laminate if you are wanting a genuine timber floor at a cost effective price. Urban plank can be used as flooring, wall panelling and ceiling coverings. The range is style-centric, offering 8 trending colours finished with multiple layers of matte lacquer, making it durable and hard-wearing. The planks can be sanded back 1-2 times and are suitable for both residential and commercial environments. With a Uniclic® locking profile we recommend that Urban Plank is directly stuck, although it can be floated if required. A generous 25 year residential warranty and 5 year commercial warranty is offered with this product.



## Smartfloor | 15mm thick European Oak

Page 43

\$\$

Smartfloor engineered timber flooring features a 4mm solid European Oak wear layer allowing 2-3 re-sands, if required. There are 9 classic colours in the range that can easily be suited to an array of interior styles. The range is finished with forté's exclusive PureMatte lacquer which provides a hard-wearing, stylish matte finish. With a tongue and groove profile, Smartfloor can be used as flooring, wall panelling and ceiling coverings and is designed to be directly fixed to the substrate. A generous 25 year residential warranty and 5 year commercial warranty is offered with this product.




## Ultra | 21mm thick European Oak

Page 51

\$\$\$

Ultra engineered timber flooring features a 6mm European Oak wear layer. This generous wear layer makes for an extremely durable product that can be sanded back 4-5 times, if required. Ultra offers 9 classic colours that can be easily incorporated into an array of interior styles. The range is finished with forté's exclusive PureMatte lacquer which offers a hard-wearing, stylish matte finish. With a tongue and groove profile, Ultra is suitable for flooring and is designed to be directly fixed to the substrate. A generous 25 year residential warranty and 5 year commercial warranty is offered with this product.

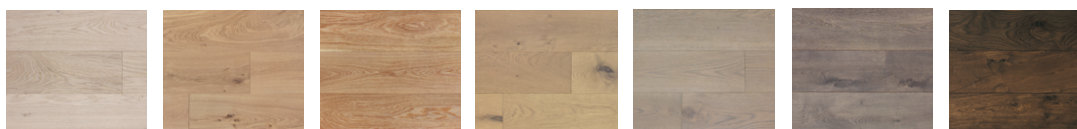


## Villa | 15mm thick Rough-Sawn European Oak

Page 35

\$\$\$

Villa engineered timber flooring features unique rough-sawn planks to achieve the subtle look of an aged, worn floor. The plank's edges are also distressed, further enhancing its rustic character. With a 4mm European Oak wear layer (15mm total thickness), Villa can be re-sanded 2-3 times if required. The range offers 6 unique colours in a luxurious 240mm wide plank, finished with a hard-wearing matte lacquer. Villa can be used as flooring, wall panelling and ceiling coverings and is complete with a tongue and groove profile. A generous 25 year residential warranty and 5 year commercial warranty is offered with this product.

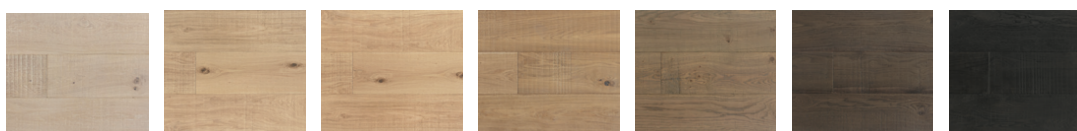



**Manor Atelier | 15 & 19mm thick French Oak**

Page 24

\$\$\$\$

Manor Atelier is crafted from PEFC certified luxury French oak. The engineered planks are 19mm in thickness including both a 6mm solid European oak wear layer and backing layer for superior stability and is complete with a tongue and groove profile (some colours are also available in 15mm with a 4mm wear layer). The Atelier range is heavily brushed to emphasise the timber’s natural grain and is finished with an ageing stain and raw lacquer, resulting in a highly durable, luxurious coating. The range consists of 4 deluxe colours + unfinished in wide and long planks. Manor Atelier can be used as flooring, wall panelling and ceiling coverings. A generous 25 year residential warranty and 5 year commercial warranty is offered with this product.



**Manor Classique | 15mm thick French Oak**

Page 28

\$\$\$

Manor Classique is crafted from PEFC certified luxury French oak. The engineered planks are 15mm in thickness including a 4mm solid oak wear layer allowing 2-3 re-sands if required. The Classique range is lightly brushed and hand-scraped to create a subtle, luxurious texture and is finished with an ageing stain and raw lacquer, resulting in a unique, durable coating. Manor Classique is available in 5 deluxe colours and can be used as flooring, wall panelling and ceiling coverings and is complete with a tongue and groove profile. A generous 25 year residential warranty and 5 year commercial warranty is offered with this product.



**Manor Rustique | 15mm thick French Oak**

Page 32

\$\$\$

Manor Rustique is crafted from PEFC certified luxury French oak. The engineered planks are 15mm in thickness including a 4mm solid oak wear layer allowing 2-3 re-sands if necessary. The Rustique range is very heavily brushed to create a deep and textural luxurious surface that can be felt underfoot. It is finished with an ageing stain and raw lacquer, resulting in a unique, durable coating. The range consists of 3 deluxe colours. Manor Rustique can be used as flooring, wall panelling and ceiling coverings and is complete with a tongue and groove profile. A generous 25 year residential warranty and 5 year commercial warranty is offered with this product.



**Pro-plank | 15mm thick Unfinished European Oak**

Page 63

\$

Pro-plank engineered timber flooring features a 4mm solid European Oak wear layer allowing 2-3 re-sands if required. Pro-plank is brushed, bevelled and supplied unfinished, ready to be custom coated to suit specific interior schemes - Forté have over 100 custom colours available. With a tongue and groove profile, Pro-Plank can be used as flooring, wall panelling and ceiling coverings and is designed to be directly fixed to the substrate. A generous 25 year residential warranty and 5 year commercial warranty is offered with this product. Available in prime (clean) and feature grade as well as herringbone and chevron patterns.



# timber wall panelling.

## **Imondi Lamella | 4mm thick Reclaimed Pine** Page 75

\$

Imondi 4mm solid lamellas are crafted from aged reclaimed European Oak or Pine. Due to their construction, Imondi lamellas are a cost effective and sustainable solution for wall panelling and ceilings. Re-purposed with history, they add character and luxury to interiors while also being FSC and LEED certified. Imondi Lamellas are available in 5 different styles and are designed to be directly fixed to wall substrates and feature a butt joint profile. Due to being genuinely reclaimed, the lamellas naturally vary in length, thickness, width and colour.



## **Imondi Plank | 15 & 21mm thick Reclaimed Oak** Page 72

\$\$\$

Imondi reclaimed engineered planks are crafted from aged, reclaimed European Oak or Pine. Due to their construction, Imondi planks can be used as flooring, wall panelling and ceiling coverings. The planks are either 15mm (with a 4mm solid wear layer) or 21mm (with a 6mm solid wear layer) and vary in finishes depending on the nature of the oak. Re-purposed with history, they add character and luxury to interiors while also being FSC and LEED certified. Imondi planks are available in 5 different styles and are designed to be directly fixed to floor or wall substrates and feature a sturdy tongue and groove profile. Due to being genuinely reclaimed, the planks naturally vary in length, thickness, width and colour. Imondi planks come with a generous lifetime warranty.



## **Tactile | 15mm thick Rough-sawn European Oak** Page 77

\$\$\$

Tactile engineered wall panelling features unique rough-sawn planks. The European oak planks are distressed and band-sawn to create the look of a luxury worn wall. The range has a total thickness of 15mm including a 4mm solid oak wear layer. Tactile offers 3 stunning colours and is also available in an unfinished plank ready to be custom coated. Tactile can be used as wall panelling and ceiling covering and is complete with a tongue and groove profile. A generous 25 year residential warranty and 5 year commercial warranty is offered with this product.




# outdoor flooring.

## Millboard Premium Decking - Enhanced Grain Page 86

\$\$\$\$\$


Millboard's Enhanced Grain collection is moulded from genuine, solid timber for a textured, slip-resistant look and feel. The range's contemporary design accurately recreates the subtle nuance of natural wood, and with the unique disappearing screw system, a seamless finish is achieved. At 32mm thick with a polyurethane lastane® layer, Millboard is a wood-free decking alternative that requires minimum maintenance and provides maximum quality and outdoor style. The range offers 5 classic colours, suitable for decks, balconies, public spaces, boardwalks, bridges, building facades, planter boxes, pool areas and more. A generous 25 year warranty and 5 year limited warranty is offered with this product.

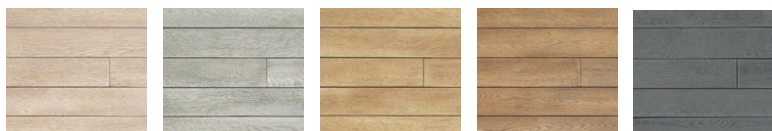

## Millboard Premium Decking - Weathered Oak Page 90

\$\$\$\$\$

Millboard's Weathered collection is moulded from 100-year-old solid, reclaimed weathered oak, creating a beautifully aged yet utterly timeless look. The range is slip and stain resistant and is seamlessly finished with a disappearing screw system. At 32mm thick, the polyurethane lastane® layer provides a wood-free decking alternative that requires minimal maintenance and provides maximum quality and outdoor style. The range offers 3 classic colours, suitable for decks, balconies, public spaces, boardwalks, bridges, building facades, planter boxes, pool areas and more. A generous 25 year warranty and 5 year limited warranty is offered with this product.

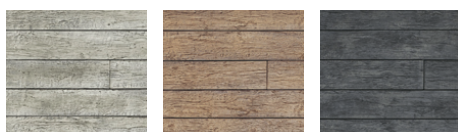



manor  
yacona  
p. 29



sort by **colour.**



**Tactile - Loft White | page 78**  
Rough-sawn wall panelling  
15mm Thickness x 240mm Width x 2.2m Length



**Imondi - Pine Wind Lamella | page 75**  
Solid pine lamella for wall panelling  
4mm Thickness x Mixed widths x Mixed lengths



**Manor - Atelier Unfinished | page 61**  
Luxury French Oak Flooring (**15mm or 19mm**)  
19mm Thickness x 260mm Width x 2.2m Length  
15mm Thickness x 220mm Width x 2.2m Length



**Manor - Atelier Natural | page 25**  
Luxury French Oak Flooring (**15mm or 19mm**)  
15 or 19mm Thickness x 220 or 260mm Width x 2.2m Length



**Pro-Plank - Herringbone | page 65**  
Unfinished European Oak (**70mm or 120mm**)  
15mm Thickness x 120mm Width x 600mm Length  
15mm Thickness x 70mm Width x 490mm Length



**Pro-Plank - Chevron | page 65**  
Unfinished European Oak Flooring  
15mm Thickness x 120mm Width x 600mm Length



**Manor - Unfinished Versailles | page 61**  
Luxury French Oak Flooring  
19mm Thickness x 800mm Width x 800mm Length



**Manor - Unfinished Chevron | page 61**  
Luxury French Oak Flooring (**15mm or 19mm**)  
19mm Thickness x 120mm Width x 600mm Length  
15mm Thickness x 120mm Width x 600mm Length



**Pro-Plank - Feature Oak | page 65**  
Unfinished European Oak Flooring  
15mm Thickness x 190mm Width x 1.9m Length



**Pro-Plank - Prime Oak | page 65**  
Unfinished European Oak Flooring  
15mm Thickness x 190mm Width x 1.9m Length



**Millboard - Limed Oak | page 91**  
Premium Decking with smooth grain  
32mm Thickness x 176mm Width x 3.6m Length






**Manor - Unfinished Herringbone | page 65**  
Luxury French Oak Flooring (**15mm or 19mm**)  
19mm Thickness x 120mm Width x 600mm Length  
15mm Thickness x 120mm Width x 600mm Length




**Tactile - Unfinished | page 78**  
Unfinished Rough-sawn wall panelling  
15mm Thickness x 240mm Width x 2.2m Length



**Urban Plank - Copenhagen | page 40**  
Quality European Oak for Flooring & Walls  
14mm Thickness x 190mm Width x 1.9m Length

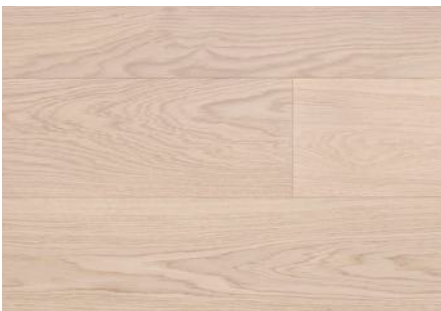

**Smartfloor - Blond Oak | page 45**  
Quality European Oak for Flooring & Walls  
15mm Thickness x 189mm Width x 1.9m Length

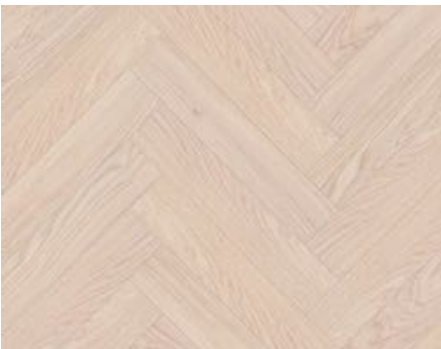

**Smartfloor - Blond Oak Herringbone | page 45**  
Quality European Oak for Flooring & Walls  
15mm Thickness x 120mm Width x 600mm Length




**Villa - Cashmere | page 36**  
Unique Rough-sawn Oak for Flooring & Walls  
15mm Thickness x 240mm Width x 2.2m Length



**Ultra - Marbled Oak | page 53**  
Durable European Oak for Flooring & Walls  
21mm Thickness x 189mm Width x 1.9m Length



**Smartfloor - Coral Oak | page 45**  
Quality European Oak for Flooring & Walls  
15mm Thickness x 189mm Width x 2.2m Length

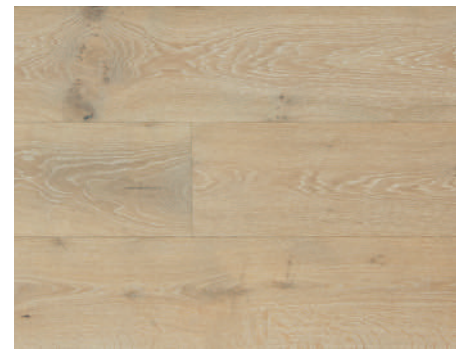

**Manor - Classique La Grange | page 29**  
Luxury French Oak for Flooring & Walls  
15mm Thickness x 220mm Width x 2.2m Length





**Manor - Classique Yacona | page 29**  
Luxury French Oak for Flooring & Walls  
15mm Thickness x 220mm Width x 2.2m Length



**Manor - Rustique Cannelton | page 32**  
Luxury French Oak for Flooring & Walls  
15mm Thickness x 220mm Width x 2.2m Length



**Villa - Wheat | page 37**  
Unique Rough-sawn Oak for Flooring & Walls  
15mm Thickness x 240mm Width x 2.2m Length




**Urban Plank - London | page 40**  
Quality European Oak for Flooring & Walls  
14mm Thickness x 190mm Width x 1.9m Length



**Villa - Unfinished | page 37**  
Unique Rough-sawn Oak for Flooring & Walls  
15mm Thickness x 240mm Width x 2.2m Length



**Manor - Classique Hillsdale | page 29**  
Luxury French Oak for Flooring & Walls  
15mm Thickness x 220mm Width x 2.2m Length

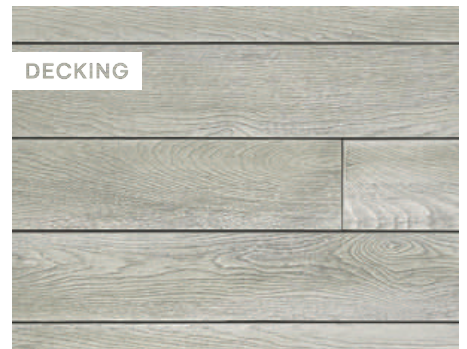

**Millboard - Smoked Oak | page 87**  
Premium Decking with smooth grain  
32mm Thickness x 176mm Width x 3.6m Length



**Tactile - Natural | page 79**  
Rough-sawn wall panelling  
15mm Thickness x 240mm Width x 2.2m Length



**Smartfloor - Prime Oak | page 45**  
Quality European Oak for Flooring & Walls  
15mm Thickness x 189mm Width x 1.9m Length





**Ultra - Champagne Oak | page 53**

Durable European Oak for Flooring & Walls  
21mm Thickness x 189mm Width x 1.9m Length



**Smartfloor - Feature Oak | page 45**

Quality European Oak for Flooring & Walls  
15mm Thickness x 189mm Width x 2.2m Length




**Ultra - Bordeaux Oak | page 53**

Durable European Oak for Flooring & Walls  
21mm Thickness x 189mm Width x 1.9m Length



**Urban Plank - New York | page 41**

Quality European Oak for Flooring & Walls  
14mm Thickness x 190mm Width x 1.9m Length

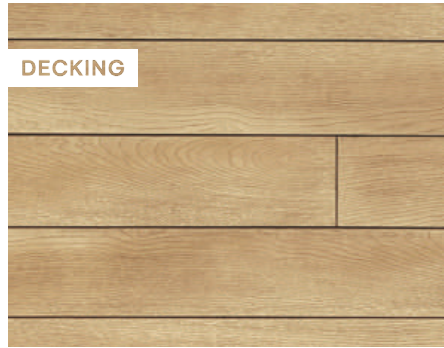

**Millboard - Golden Oak | page 87**

Premium Decking with light grain  
32mm Thickness x 176mm Width x 3.6m Length



**Manor - Atelier Classic | page 25**

Luxury French Oak Flooring (15mm or 19mm)  
19mm Thickness x 260mm Width x 2.2m Length  
15mm Thickness x 220mm Width x 2.2m Length




**Ultra - Tussock Oak | page 57**

Durable European Oak for Flooring & Walls  
21mm Thickness x 189mm Width x 1.9m Length




**Villa - Dune | page 37**

Unique Rough-sawn Oak for Flooring & Walls  
15mm Thickness x 240mm Width x 2.2m Length

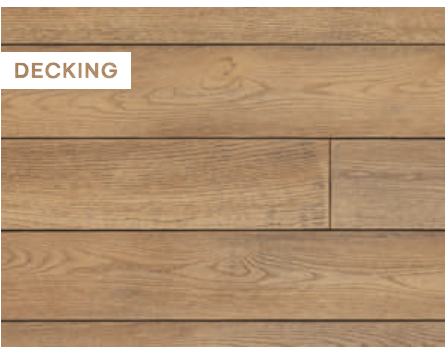

**Millboard - Coppered Oak | page 87**

Premium Decking with smooth grain  
32mm Thickness x 176mm Width x 3.6m Length

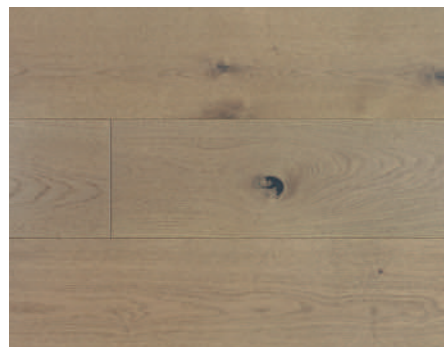

**Urban Plank - Milan | page 41**


Quality European Oak for Flooring & Walls  
14mm Thickness x 190mm Width x 1.9m Length



**Imondi - Holland Park Lamella | page 75**

Solid pine lamella for wall panelling  
4mm Thickness x Mixed widths x Mixed lengths



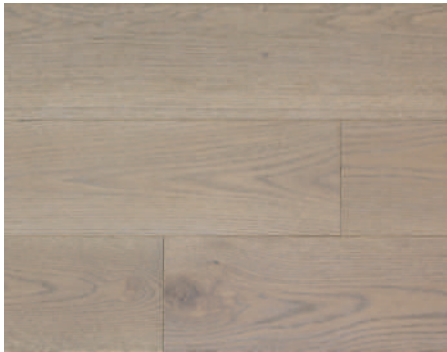

**Ultra - Driftwood Oak | page 56**  
 Durable European Oak for Flooring & Walls  
 21mm Thickness x 189mm Width x 1.9m Length



**Smartfloor - Sandstone Oak | page 45**  
 Quality European Oak for Flooring & Walls  
 15mm Thickness x 189mm Width x 2.2m Length



**Urban Plank - Madrid | page 41**  
 Quality European Oak for Flooring & Walls  
 14mm Thickness x 190mm Width x 1.9m Length



**Ultra - Mink Grey Oak | page 56**  
 Durable European Oak for Flooring & Walls  
 21mm Thickness x 189mm Width x 1.9m Length



**Manor - Atelier Malachite | page 25**  
 Luxury French Oak Flooring (15mm or 19mm)  
 19mm Thickness x 260mm Width x 2.2m Length  
 15mm Thickness x 220mm Width x 2.2m Length

**Millboard - Vintage Oak | page 91**  
 Premium Decking with heavy grain  
 32mm Thickness x 200mm Width x 3.2m Length



**Urban Plank - Paris | page 41**  
 Quality European Oak for Flooring & Walls  
 14mm Thickness x 190mm Width x 1.9m Length



**Manor Classique - Heathered Grey | page 29**  
 Luxury French Oak for Flooring & Walls  
 15mm Thickness x 220mm Width x 2.2m Length



**Manor Atelier - Cobble Stone | page 25**  
 Luxury French Oak Flooring (15mm or 19mm)  
 19mm Thickness x 260mm Width x 2.2m Length  
 15mm Thickness x 220mm Width x 2.2m Length





**Manor - Rustique Slate Grey | page 32**  
 Luxury French Oak for Flooring & Walls  
 15mm Thickness x 220mm Width x 2.2m Length



**Urban Plank - Vienna | page 40**  
 Quality European Oak for Flooring & Walls  
 14mm Thickness x 190mm Width x 1.9m Length



**Villa - Limestone | page 37**  
 Unique Rough-sawn Oak for Flooring & Walls  
 15mm Thickness x 240mm Width x 2.2m Length



**Smartfloor - Antique Oak Herringbone | page 46**  
 Quality European Oak for Flooring & Walls  
 15mm Thickness x 189mm Width x 2.2m Length



**Smartfloor - Antique Oak | page 46**  
 Quality European Oak for Flooring & Walls  
 15mm Thickness x 189mm Width x 2.2m Length



**Imondi - Salvage Brownstone Plank | page 73**  
 Genuine Reclaimed Oak for Wall Panelling  
 21mm Thickness x Mixed widths x Mixed lengths



**Imondi - Salvage Pine Raw Plank | page 73**  
 Genuine Reclaimed Oak for Wall Panelling  
 15mm Thickness x Mixed widths x Mixed lengths




**Imondi - Pine Paint Lamella | page 75**  
 Solid pine lamella for wall panelling  
 4mm Thickness x Mixed widths x Mixed lengths



**Imondi - Salvage Oak Grey Plank | page 73**  
 Genuine Reclaimed Oak for Wall Panelling  
 15mm Thickness x Mixed widths x Mixed lengths



**Smartfloor - Marron Oak | page 46**  
 Quality European Oak for Flooring & Walls  
 15mm Thickness x 189mm Width x 2.2m Length

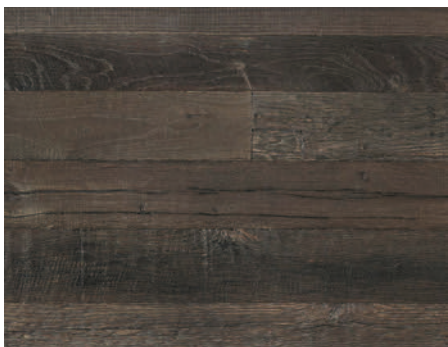

**Imondi - Salvage Oak Earth Plank | page 73**  
 Genuine Reclaimed Oak for Wall Panelling  
 15mm Thickness x Mixed widths x Mixed lengths





**Ultra - Vintage Oak | page 56**

Durable European Oak for Flooring & Walls  
21mm Thickness x 189mm Width x 1.9m Length



**Villa - Cocoa | page 37**

Unique Rough-sawn Oak for Flooring & Walls  
15mm Thickness x 240mm Width x 2.2m Length




**Urban Plank - Tokyo | page 41**

Quality European Oak for Flooring & Walls  
14mm Thickness x 190mm Width x 1.9m Length




**Manor - Classique Black Forest | page 29**

Luxury French Oak for Flooring & Walls  
15mm Thickness x 220mm Width x 2.2m Length

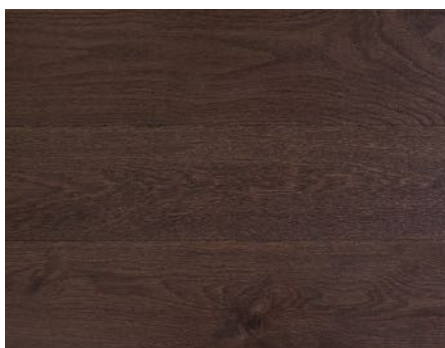


**Smartfloor - Lignite Oak | page 46**

Quality European Oak for Flooring & Walls  
15mm Thickness x 189mm Width x 2.2m Length

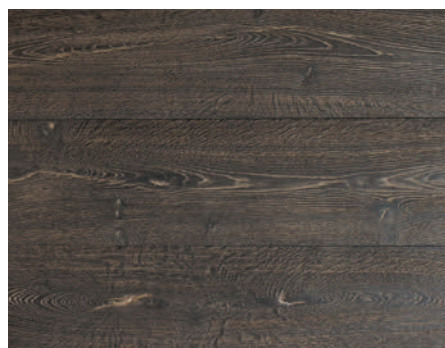


**Manor - Rustique McKinny | page 33**

Luxury French Oak for Flooring & Walls  
15mm Thickness x 220mm Width x 2.2m Length

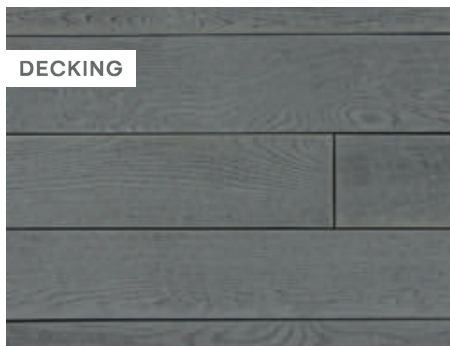

**Millboard - Brushed Basalt | page 87**

Premium Decking with smooth grain  
32mm Thickness x 176mm Width x 3.6m Length

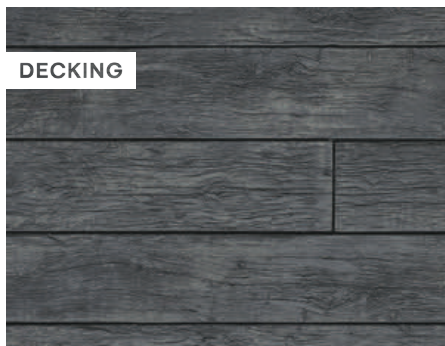


**Millboard - Embered Oak | page 91**

Premium Decking with heavy grain  
32mm Thickness x 200mm Width x 3.2m Length



**Tactile - Ebony | page 79**

Rough-sawn European Oak Wall Panelling  
15mm Thickness x 240mm Width x 2.2m Length

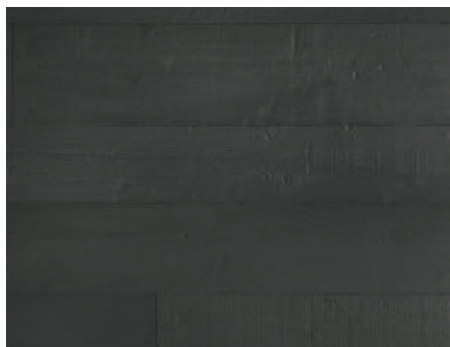

**Imondi - Pine Fire Lamella | page 75**

Solid pine lamella for wall panelling  
4mm Thickness x Mixed widths x Mixed lengths



**Villa - Raven | page 37**

Unique Rough-sawn Oak for Flooring & Walls  
15mm Thickness x 240mm Width x 2.2m Length

smartfloor  
lignite oak  
p. 46



smartfloor  
lignite oak  
p. 46





●  
ultra  
marbled oak  
p. 53







# manor.

15 & 19mm Luxury French Oak  
for Flooring and Wall Panelling

manor atelier  
classic  
p. 25



manor atelier classic & brass flat bar / rodd & gunn, wellington

# manor atelier.

## scope

Luxury French Oak for flooring and wall panelling. Wide and long planks featuring deep grains and rustic character. Suitable for indoor use, not suitable for some wet areas.

## manor atelier product details

**Construction** / engineered oak

**Species** / French Oak

**Grade** / rustic

**Finish** / ageing stain and raw lacquer

**Surface Texture** / heavily brushed and hand scraped

**Core** / cross-directional ply

**Joint Profile** / tongue and groove

**Bevel** / long edges

**Re-sanding** / 19mm [4-5 times] 15mm [2-3 times]

**Installation Method** / direct stick - refer to forté installation guidelines

**Underfloor Heating** / compatible with hydronic systems, for others contact forté's technical team

**Warranty** / 25 year residential, 5 year commercial

## manor atelier product specifications

**Fire Ratings** / Flooring: Critical Radiant Flux 2.2 kw/m<sup>2</sup>

Wall & Ceilings: Group 3 (Note: Fire shield can be applied to meet Group 1-S)

**Slip Ratings** / AS/NZS 4586: Dry Test Classification F, Mean COF 0.85,

Moderate to Very Low risk. Wet Test Classification X, Pendulum Mean 42 BPN, Moderate risk

**Formaldehyde Emission** / E1

**Sustainability** / PEFC Certified

**Timber Density** / 650kg/m<sup>3</sup>



Images are indication only, please see plank for true representation



## manor atelier classic

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank 19	stocked	MAC19	19mm	6mm	260mm	2200mm
Nosing 19	stocked	SN-MAC19	19mm	6mm	70x35mm	2200mm
Plank 15	stocked	MAC15	15mm	4mm	220mm	2200mm
Nosing 15	stocked	SN-MAC15	15mm	4mm	70x35mm	2200mm
H/bone 19	indent	MHC19	19mm	6mm	120mm	600mm
H/bone 15	indent	MHC15	15mm	4mm	120mm	600mm
Chevron 19	indent	MCC19	19mm	6mm	120mm	720mm
Chevron 15	indent	MCC15	15mm	4mm	120mm	720mm
Grande	indent	MACG19	19mm	6mm	340mm	3900mm
Versailles	indent	MVC19	19mm	6mm	800mm	800mm



## manor atelier cobble stone

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank 19	indent	MACS19	19mm	6mm	260mm	2200mm
Nosing 19	indent	SN-MACS19	19mm	6mm	70x35mm	2200mm
Plank 15	indent	MACS15	15mm	4mm	220mm	2200mm
Nosing 15	indent	SN-MACS15	15mm	4mm	70x35mm	2200mm
Grande	indent	MCSG19	19mm	6mm	340mm	3900mm
Versailles	indent	MVCS19	19mm	6mm	800mm	800mm



## manor atelier natural

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank 19	indent	MAN19	19mm	6mm	260mm	2200mm
Nosing 19	indent	SN-MAN19	19mm	6mm	70x35mm	2200mm
Plank 15	indent	VAN15	15mm	4mm	220mm	2200mm
Nosing 15	indent	SN-MAN15	15mm	4mm	70x35mm	2200mm



## manor atelier unfinished

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank 19	indent	MAU19	19mm	6mm	260mm	2200mm
Nosing 19	indent	SN-MAU19	19mm	6mm	70x35mm	2200mm
Plank 15	indent	MAU15	15mm	4mm	220mm	2200mm
Nosing 15	indent	SN-MAU15	15mm	4mm	70x35mm	2200mm



## manor atelier malachite

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	MAM19	19mm	6mm	260mm	2200mm
Nosing	indent	SN-MAM19	15mm	4mm	70x35mm	2200mm



## stair nosings & brass trims

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
manor nosing 15	indent	SN-***15	15mm	4mm	70x35mm	2200mm
manor nosing 19	indent	SN-***19	19mm	6mm	70x35mm	2200mm

Product	Lead	Code	Material	Total Thickness	Width	Length
brass flat bar 19	1 week	BFB19	Brass Alloy 385	3.175mm	19.05mm	3600mm
brass flat bar 13	1 week	BFB13	Brass Alloy 385	3.175mm	12.7mm	3600mm
brass angle bar 13	1 week	BAB13	Brass Alloy 385	12.7mm	12.7mm	3600mm
brass angle bar 19	1 week	BAB19	Brass Alloy 385	19mm	19mm	3600mm





manor  
malachite  
p. 25



manor  
cobble stone  
p. 25

# manor classique.

## scope

Luxury French Oak for flooring and wall panelling. Lightly brushed and hand scraped for a smoother surface. Suitable for indoor use, not suitable for some wet areas.

## manor classique product details

**Construction** / engineered oak

**Species** / French Oak

**Grade** / feature grade excluding la grange - rustic grade

**Finish** / ageing stain and raw lacquer

**Surface Texture** / lightly brushed and hand scraped

**Core** / cross-directional ply

**Joint Profile** / tongue and groove

**Bevel** / plank - long edges | herringbone & chevron - 4 sides

**Re-sanding** / approx. 2-3 times

**Installation Method** / direct stick - refer to forté installation guidelines

**Underfloor Heating** / compatible with hydronic systems, for others contact forté's technical team

**Warranty** / 25 year residential, 5 year commercial

## manor classique product specifications

**Fire Ratings** / Flooring: Critical Radiant Flux 2.2 kw/m<sup>2</sup>

Wall & Ceilings: Group 3 (Note: Fire shield can be applied to meet Group 1-S)

**Slip Ratings** / AS/NZS 4586: Dry Test Classification F, Mean COF 0.85,

Moderate to Very Low risk. Wet Test Classification X, Pendulum Mean 42 BPN, Moderate risk

**Formaldehyde Emission** / E1

**Sustainability** / PEFC Certified

**Timber Density** / 650kg/m<sup>3</sup>



Images are indication only, please see plank for true representation



## classique hillsdale

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	MCH15	15mm	4mm	220mm	2200mm
Nosing	indent	SN-MCH15	15mm	4mm	70x35mm	2200mm
Herringbone	indent	MHH15	15mm	4mm	120mm	600mm
Chevron	indent	MCHH15	15mm	4mm	120mm	720mm



## classique yacona

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	MCY15	15mm	4mm	220mm	2200mm
Nosing	indent	SN-MCY15	15mm	4mm	120mm	2200mm
Herringbone	indent	MHY15	15mm	4mm	120mm	600mm
Chevron	indent	MCHY15	15mm	4mm	120mm	720mm



## classique la grange

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	MCLG15	15mm	4mm	220mm	2200mm
Nosing	indent	SN-MCLG15	15mm	4mm	120mm	2200mm
Herringbone	indent	MHLG15	15mm	4mm	120mm	600mm
Chevron	indent	MCHLG15	15mm	4mm	120mm	720mm



## classique heathered grey

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	MCHG15	15mm	4mm	220mm	2200mm
Nosing	indent	SN-MCHG15	15mm	4mm	120mm	2200mm
Herringbone	indent	MHGG15	15mm	4mm	120mm	600mm
Chevron	indent	MCHGG15	15mm	4mm	120mm	720mm



## classique black forest

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	MCBF15	15mm	4mm	220mm	2200mm
Nosing	indent	SN-MCBF15	15mm	4mm	120mm	2200mm
Herringbone	indent	MHBF15	15mm	4mm	120mm	600mm
Chevron	indent	MCHBF15	15mm	4mm	120mm	720mm



## stair nosings & brass trims

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
manor nosing 15	indent	SN-***15	15mm	4mm	70x35mm	2200mm

Product	Lead	Code	Material	Total Thickness	Width	Length
brass flat bar 19	1 week	BFB19	Brass Alloy 385	3.175mm	19.05mm	3600mm
brass flat bar 13	1 week	BFB13	Brass Alloy 385	3.175mm	12.7mm	3600mm
brass angle bar 13	1 week	BAB13	Brass Alloy 385	12.7mm	12.7mm	3600mm
brass angle bar 19	1 week	BAB19	Brass Alloy 385	19mm	19mm	3600mm



la grange  
stair nosing  
p. 29

manor  
la grange  
p. 29





manor  
heathered  
grey p. 29





## rustique cannelton

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	MRC15	15mm	4mm	220mm	2200mm
Nosing	indent	SN-MRC15	15mm	4mm	70x35mm	2200mm



## rustique slate grey

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	MRSG15	15mm	4mm	220mm	2200mm
Nosing	indent	SN-MRSG15	15mm	4mm	70x35mm	2200mm

# manor rustique.

## scope

Luxury French Oak for flooring and wall panelling. Heavily brushed and hand scraped for a textured and rustic surface. Suitable for indoor use, not suitable for some wet areas.

## manor rustique product details

**Construction** / engineered oak

**Species** / French oak

**Grade** / feature

**Finish** / ageing stain and raw lacquer

**Surface Texture** / heavily brushed and hand scraped

**Core** / cross-directional ply

**Joint Profile** / tongue and groove

**Bevel** / plank - long edges

**Re-sanding** / approx. 2-3 times

**Installation Method** / direct stick - refer to forté installation guidelines

**Underfloor Heating** / compatible with hydronic systems, for others contact forté's technical team

**Warranty** / 25 year residential, 5 year commercial

## manor rustique product specifications

**Fire Ratings** / Flooring: Critical Radiant Flux 2.2 kw/m<sup>2</sup>

Wall & Ceilings: Group 3 (Note: Fire shield can be applied to meet Group 1-S)

**Slip Ratings** / AS/NZS 4586: Dry Test Classification F, Mean COF 0.85,

Moderate to Very Low risk. Wet Test Classification X, Pendulum Mean 42 BPN, Moderate risk

**Formaldehyde Emission** / E1

**Sustainability** / PEFC Certified

**Timber Density** / 650kg/m<sup>3</sup>



rustique mckinny

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	MRM15	15mm	4mm	220mm	2200mm
Nosing	indent	SN-MRM15	15mm	4mm	70x35mm	2200mm



stair nosings & brass trims

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
rustique nosing 15	indent	SN-***15	15mm	4mm	70x35mm	2200mm

Product	Lead	Code	Material	Total Thickness	Width	Length
brass flat bar 19	1 week	BFB19	Brass Alloy 385	3.175mm	19.05mm	3600mm
brass flat bar 13	1 week	BFB13	Brass Alloy 385	3.175mm	12.7mm	3600mm
brass angle bar 13	1 week	BAB13	Brass Alloy 385	12.7mm	12.7mm	3600mm
brass angle bar 19	1 week	BAB19	Brass Alloy 385	19mm	19mm	3600mm











villa dune  
p. 37

villa.

15mm Pre-finished Rough-sawn Oak  
for Flooring and Wall Panelling



### cashmere

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	VRSCA15	15mm	4mm	240mm	2200mm



### unfinished

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	VRSU15	15mm	4mm	240mm	2200mm

# villa.

## scope

Rough-sawn European Oak planks for flooring and wall panelling. Specially handcrafted to create a distressed, rustic style. Suitable for indoor use, not suitable for some wet areas.

## villa product details

- Construction** / engineered oak
- Species** / European oak
- Grade** / feature
- Finish** / matte lacquer
- Surface Texture** / rough-sawn
- Core** / cross-directional ply
- Joint Profile** / tongue and groove
- Bevel** / distressed long-edges
- Re-sanding** / approx. 2-3 times
- Sustainability** / all Forté products are sustainable, please visit [forteflooring.co.nz/environmental](http://forteflooring.co.nz/environmental)
- Installation Method** / direct stick - refer to forté installation guidelines
- Underfloor Heating** / compatible with hydronic systems, for others contact forté's technical team
- Warranty** / 25 year residential, 5 year commercial

## villa product specifications

TBC - Please enquire



## wheat

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	VRSW15	15mm	4mm	240mm	2200mm



## dune

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	VRSD15	15mm	4mm	240mm	2200mm



## limestone

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	VRSL15	15mm	4mm	240mm	2200mm



## cocoa

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	VRSCO15	15mm	4mm	240mm	2200mm



## raven

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	VRSR15	15mm	4mm	240mm	2200mm



urban plank  
london  
p. 40



# urban plank.

14mm Pre-finished European Oak  
for Flooring and Wall Panelling



### copenhagen

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	UPC190	14mm	3mm	190mm	1900mm



### london

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	UPL190	14mm	3mm	190mm	1900mm

# urban plank.

## scope

Hard-wearing, cost effective European Oak planks for flooring and wall panelling. A great timber alternative to laminate. Suitable for indoor use, not suitable for some wet areas.

## urban plank product details

- Construction** / engineered oak
- Species** / European oak
- Grade** / rustic
- Finish** / hard-wearing matte lacquer
- Surface Texture** / brushed
- Joint Profile** / Uniclic®
- Micro Bevel** / 4 sides
- Re-sanding** / approx. 1-2 times
- Sustainability** / all Forté products are sustainable, please visit [forteflooring.co.nz/environmental](http://forteflooring.co.nz/environmental)
- Installation Method** / direct stick is recommended, can be floated if required. Refer to forté installation guidelines
- Underfloor Heating** / compatible with hydronic systems, for others contact Forté's technical team
- Warranty** / 25 year residential, 5 year commercial

## urban plank product specifications

- Fire Ratings** / Flooring: Critical Radiant Flux 5.7 kw/m²  
Wall & Ceilings: Group 3 (Note: Fire shield can be applied to meet Group 1-S)
- Slip Ratings** / AS/NZS 4586: Dry Test Classification F, Mean COF 0.75,  
Moderate to Very Low risk. Wet Test Classification X, Pendulum Mean 41 BPN, Moderate risk
- Formaldehyde Emission** / E1
- Timber Density** / 650kg/m³



Images are indication only, please see plank for true representation



## madrid

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	UPMA190	14mm	3mm	190mm	1900mm



## paris

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	UPP190	14mm	3mm	190mm	1900mm



## new york

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	UPN190	14mm	3mm	190mm	1900mm



## milan

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	UPML190	14mm	3mm	190mm	1900mm



## vienna

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	UPV190	14mm	3mm	190mm	1900mm



## tokyo

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	UPT190	14mm	3mm	190mm	1900mm







# smartfloor.

15mm Pre-finished European Oak  
for Flooring and Wall Panelling

smartfloor  
blond oak  
p. 45





blond oak (feature grade)

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SBOF189	15mm	4mm	189mm	2200mm

smartfloor.

scope

Quality European oak planks for flooring and wall panelling. Finished with the durable PureMatte lacquer. Suitable for indoor use, not suitable for some wet areas.


smartfloor product details

- Construction / engineered oak
- Species / European oak
- Grade / feature / blond oak - light feature / prime oak - prime
- Finish / PureMatte lacquer
- Surface Texture / brushed
- Core / 7 layer cross-directional ply
- Joint Profile / tongue and groove
- Bevel / planks - 4 sides
- Re-sanding / approx. 2-3 times
- Sustainability / all Forté products are sustainable, please visit [forteflooring.co.nz/environmental](http://forteflooring.co.nz/environmental)
- Installation Method / direct stick - refer to forté installation guidelines
- Underfloor Heating / compatible with hydronic systems, for others contact Forté's technical team
- Warranty / 25 year residential, 5 year commercial

smartfloor product specifications

- NZBC Fire Ratings / ISO 9239-1 Flooring: Critical Radiant Flux 5.7kw/m²
- ISO 9705: Wall & Ceilings: Group 3 (Note: Fire shield can be applied to meet Group 1-S)
- NZBC Slip Ratings / AS/NZS 4586: Dry Test Classification F, Mean COF 0.75, Moderate to Very Low risk. Wet Test Classification X, Pendulum Mean 41 BPN, Moderate risk
- Reaction to Fire / EN13501-1: Class Cfl - S1
- Formaldehyde Emission / EN717-1: E1
- Timber Density / 650kg/m³

Images are indication only, please see plank for true representation

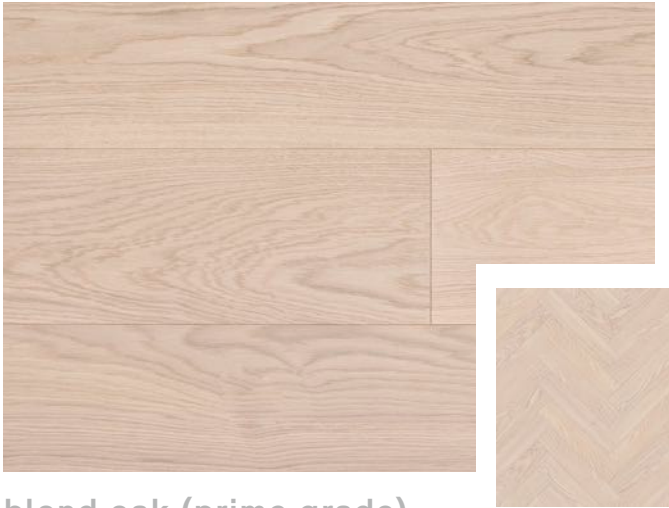

## blond oak (prime grade)

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SBO189	15mm	4mm	189mm	1900mm
Nosing	stocked	SN-SBO	15mm	4mm	70x35mm	1900mm
H/bone	stocked	SBOHB120	15mm	4mm	120mm	600mm



## feature oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SFO189	15mm	4mm	189mm	2200mm
Nosing	stocked	SN-SNO	15mm	4mm	70x35mm	2200mm
H/bone	stocked	SFOHB120	15mm	4mm	120mm	600mm



## prime oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SPO189	15mm	4mm	189mm	1900mm
Nosing	stocked	SN-SNO	15mm	4mm	70x35mm	1900mm
H/bone	stocked	SPOHB120	15mm	4mm	120mm	600mm



## coral oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SCLO189	15mm	4mm	189mm	2200mm
Nosing	stocked	SN-SCLO	15mm	4mm	70x35mm	2200mm

Also available in Herringbone (indent)



## sandstone oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SSO189	15mm	4mm	189mm	2200mm
Nosing	stocked	SN-SSO	15mm	4mm	70x35mm	2200mm

Also available in Herringbone (indent)



## stair nosings & brass trims

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Smartfloor nosing	stocked	SN-***15	15mm	4mm	70x35mm	2200mm

Product	Lead	Code	Material	Total Thickness	Width	Length
brass flat bar 19	1 week	BFB19	Brass Alloy 385	3.175mm	19.05mm	3600mm
brass flat bar 13	1 week	BFB13	Brass Alloy 385	3.175mm	12.7mm	3600mm
brass angle bar 13	1 week	BAB13	Brass Alloy 385	12.7mm	12.7mm	3600mm
brass angle bar 19	1 week	BAB19	Brass Alloy 385	19mm	19mm	3600mm



Images are indication only, please see plank for true representation



## graphite oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SGO189	15mm	4mm	189mm	2200mm
Nosing	stocked	SN-SGO	15mm	4mm	70x35mm	2200mm

Also available in Herringbone (indent)



## antique oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SAO189	15mm	4mm	189mm	2200mm
Nosing	stocked	SN-SAO	15mm	4mm	70x35mm	2200mm
H/bone	stocked	SAOHB120	15mm	4mm	120mm	600mm



## lignite oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SLO189	15mm	4mm	189mm	2200mm
Nosing	stocked	SN-SLO	15mm	4mm	70x35mm	2200mm

Also available in Herringbone (indent)



## marron oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SMO189	15mm	4mm	189mm	2200mm
Nosing	stocked	SN-SMO	15mm	4mm	70x35mm	2200mm

Also available in Herringbone (indent)



smartfloor  
lignite oak  
p. 46

project - botanic bar, christchurch / design - spaceworks





antique oak  
herringbone  
p. 46



smartfloor  
custom width  
p. 45

smartfloor  
custom width  
p. 45



## CUSTOM PLANKS

Let us know what look  
you want and we can  
create it

smartfloor  
custom width  
p. 45





# ultra.

21mm Pre-finished  
European Oak for Flooring

ultra  
marbled oak  
p. 53





project - kiwi property offices, auckland / fit-out - warren & mahoney

ultra  
bordeaux  
oak p. 53

# ultra.

## scope

Durable European oak planks for flooring. Finished with the hard-wearing PureMatte lacquer. Suitable for indoor use, not suitable for some wet areas.

## ultra product details

**Construction** / engineered oak

**Species** / European oak

**Finish** / PureMatte lacquer

**Surface Texture** / brushed

**Grade / Feature grade** - bordeaux oak, tussock oak, driftwood oak, mink grey oak, scorched oak

**Light Feature grade** - marbled oak **Heavy rustic grade** - vintage oak **Prime grade** - champagne oak

**Core** / cross-directional ply

**Joint Profile** / tongue and groove

**Bevel** / 4 sides

**Re-sanding** / approx. 4-5 times

**Sustainability** / all Forté products are sustainable, please visit [forteflooring.co.nz/environmental](https://forteflooring.co.nz/environmental)

**Installation Method** / direct stick - refer to forté installation guidelines

**Underfloor Heating** / compatible with hydronic systems, for others contact Forté's technical team

**Warranty** / 25 year residential, 5 year commercial

## ultra product specifications

**Fire Ratings** / Flooring: Critical Radiant Flux 5.7kw/m<sup>2</sup>

Wall & Ceilings: Group 2S (Note: Fire shield can be applied to meet Group 1-S)

**Slip Ratings** / AS/NZS 4586: Dry Test Classification F, Mean COF 0.70,

Moderate to Very Low risk. Wet Test Classification X, Pendulum Mean 37 BPN, Moderate risk

**Formaldehyde Emission** / E1

**Timber Density** / 650kg/m<sup>3</sup>



Images are indication only, please see plank for true representation



## marbled oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	PUMO	21mm	6mm	189mm	1.9m
Nosing	stocked	SN-PUMO	21mm	6mm	70x35mm	1.9m



## bordeaux oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	PUBO	21mm	6mm	189mm	1.9m
Nosing	stocked	SN-PUBO	21mm	6mm	70x35mm	1.9m



## champagne oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	PUCO	21mm	6mm	189mm	1.9m
Nosing	stocked	SN-PUCO	21mm	6mm	70x35mm	1.9m



## driftwood oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	PUDO	21mm	6mm	189mm	1.9m
Nosing	stocked	SN-PUDO	21mm	6mm	70x35mm	1.9m



## vintage oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	PUVO	21mm	6mm	189mm	1.9m
Nosing	stocked	SN-PUVO	21mm	6mm	70x35mm	1.9m



## stair nosings & brass trims

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Ultra stair nosing	stocked	SN-***15	15mm	4mm	70x35mm	2200mm

Product	Lead	Code	Material	Total Thickness	Width	Length
brass flat bar 19	1 week	BFB19	Brass Alloy 385	3.175mm	19.05mm	3600mm
brass flat bar 13	1 week	BFB13	Brass Alloy 385	3.175mm	12.7mm	3600mm
brass angle bar 13	1 week	BAB13	Brass Alloy 385	12.7mm	12.7mm	3600mm
brass angle bar 19	1 week	BAB19	Brass Alloy 385	19mm	19mm	3600mm







ultra  
champagne  
oak p. 53



mink grey oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length	Retail Price (Incl. GST)	Trade Price (Excl. GST)
Plank	stocked	PUMGO	21mm	6mm	189mm	1.9m	\$171/m <sup>2</sup>	\$171/m <sup>2</sup>
Nosing	stocked	SN-PUMGO	21mm	6mm	70x35mm	1.9m	\$127/lgth	\$127/lgth



tussock oak

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length	Retail Price (Incl. GST)	Trade Price (Excl. GST)
Plank	stocked	PUTSO	21mm	6mm	189mm	1.9m	\$150/m <sup>2</sup>	\$150/m <sup>2</sup>
Nosing	stocked	SN-PUTSO	21mm	6mm	70x35mm	1.9m	\$127/lgth	\$127/lgth



●  
ultra  
mink grey  
oak p. 56





●  
ultra  
tussock oak  
p. 56







# manor unfinished.

15 & 19mm Unfinished Luxury French  
Oak for Flooring and Wall Panelling

manor atelier  
custom finish  
p. 61



# manor unfinished.

## scope

Luxury French Oak for flooring and wall panelling. Unfinished and ready to be coated. Suitable for indoor use, not suitable for some wet areas.

## manor unfinished product details

**Construction** / engineered oak

**Species** / French Oak

**Grade** / rustic

**Finish** / unfinished

**Surface Texture** / heavily brushed and hand scraped

**Core** / cross-directional ply

**Joint Profile** / tongue and groove

**Bevel** / long edges

**Re-sanding** / 19mm [4-5 times] 15mm [2-3 times]

**Installation Method** / direct stick - refer to forté installation guidelines

**Underfloor Heating** / compatible with hydronic systems, for others contact Forté's technical team

**Warranty** / 25 year residential, 5 year commercial

## manor unfinished product specifications

**Fire Ratings** / Flooring: Critical Radiant Flux 2.2 kw/m<sup>2</sup>

Wall & Ceilings: Group 3 (Note: Fire shield can be applied to meet Group 1-S)

**Slip Ratings** / Dependant on finishing coat applied, please refer to spec sheet

**Formaldehyde Emission** / E1

**Sustainability** / PEFC Certified

**Timber Density** / 650kg/m<sup>3</sup>





## stair nosings & brass trims

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Manor uf nosing	indent	SN-MAU15	15mm	4mm	70x35mm	2200mm
Manor uf nosing	indent	SN-MAU19	19mm	6mm	70x35mm	2200mm

Product	Lead	Code	Material	Total Thickness	Width	Length
brass flat bar 19	1 week	BFB19	Brass Alloy 385	3.175mm	19.05mm	3600mm
brass flat bar 13	1 week	BFB13	Brass Alloy 385	3.175mm	12.7mm	3600mm
brass angle bar 13	1 week	BAB13	Brass Alloy 385	12.7mm	12.7mm	3600mm
brass angle bar 19	1 week	BAB19	Brass Alloy 385	19mm	19mm	3600mm



## manor unfinished plank

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank 19	stocked	MAU19	19mm	6mm	260mm	2200mm
Nosing 19	stocked	SN-MAU19	19mm	6mm	70x35mm	2200mm
Plank 15	stocked	MAU15	15mm	4mm	220mm	2200mm
Nosing 15	stocked	SN-MAU15	15mm	4mm	70x35mm	2200mm



## manor unfinished herringbone

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Herringbone 19	indent	MHU19	19mm	6mm	120mm	600mm
Herringbone 15	indent	MHU15	15mm	4mm	120mm	600mm



## manor unfinished versailles

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
versailles	indent	MVU19	19mm	6mm	800mm	800mm



## manor unfinished chevron

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
chevron 19	indent	MCHU19	19mm	6mm	120mm	720mm
chevron 15	indent	MCHU15	15mm	4mm	120mm	720mm





# pro-plank.

15mm Unfinished European Oak  
for Flooring and Wall Panelling

pro-plank  
custom finish  
p. 65



**project** - the cut, sylvia park / **architectural design** - (jkw) janice kumar-ward

# pro-plank.

## scope

Raw, European Oak engineered planks supplied uncoated ready to be finished.  
Suitable for indoor use, not suitable for some wet areas.

## pro-plank product details

**Construction** / engineered oak

**Species** / European Oak

**Grade** / all prime grade / feature oak - feature grade

**Finish** / unfinished

**Surface Texture** / brushed

**Core** / cross-directional ply

**Backing** / ply

**Joint Profile** / tongue and groove

**Bevel** / 4 sides

**Re-sanding** / approx. 2-3 times

**Sustainability** / all Forté products are sustainable, please visit [forteflooring.co.nz/environmental](http://forteflooring.co.nz/environmental)

**Installation Method** / direct stick - refer to forté installation guidelines

**Underfloor Heating** / compatible with hydronic systems, for others contact Forté's technical team

**Warranty** / 25 year residential, 5 year commercial

## pro-plank product specifications

**NZBC Fire Ratings** / ISO 9239-1 Flooring: Critical Radiant Flux 2.2 kw/m<sup>2</sup>

ISO 9705: Wall & Ceilings: Group 3 (Note: Fire shield can be applied to meet Group 1-S)

**NZBC Slip Ratings** / Dependant on finishing coat applied, see spec sheet

**Formaldehyde Emission** / EN171-1: E1

**Timber Density** / 650kg/m<sup>3</sup>





## stair nosings & brass trims

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Pro-plank nosing	stocked	SN-PP15	15mm	4mm	70x35mm	2200mm

Product	Lead	Code	Material	Total Thickness	Width	Length
Brass flat bar 19	1 week	BFB19	Brass Alloy 385	3.175mm	19.05mm	3600mm
Brass flat bar 13	1 week	BFB13	Brass Alloy 385	3.175mm	12.7mm	3600mm
Brass angle bar 13	1 week	BAB13	Brass Alloy 385	12.7mm	12.7mm	3600mm
Brass angle bar 19	1 week	BAB19	Brass Alloy 385	19mm	19mm	3600mm



## feature

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	PPF190	15mm	4mm	190mm	1900mm



## prime

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	PPP190	15mm	4mm	190mm	1900mm



## herringbone

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
H/bone 120	stocked	PPH120	15mm	4mm	120mm	600mm
H/bone 70	stocked	PPH70	15mm	4mm	70mm	490mm



## chevron

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
chevron	stocked	PPC120	15mm	4mm	120mm	720mm



pro-plank  
chevron  
custom finish  
p. 65





pro-plank  
chevron  
custom finish  
p. 65



manor  
classique la  
grange p. 29

project - private residence, auckland



# wall panelling.

**Timber for all surfaces** / timber adds natural charm and character to interior spaces, why stop at the floor? Add further texture to your space by panelling your walls, ceiling, counter-fronts etc. Or if you are wanting to get creative, get in touch!

Watch this space, a new range is underway and coming soon.

TOUCH ME.





# imondi.

Reclaimed Planks for Flooring & Walls  
Reclaimed Solid Lamellas for Walls



project - private residence, auckland / design - studio italia

# imondi – plank.

## scope

Genuine reclaimed Oak and Pine for flooring and wall panelling.  
Suitable for indoor use, not suitable for some wet areas.

## imondi plank product details

**Construction** / engineered plank  
**Species** / European oak or pine  
**Grade** / reclaimed  
**Core** / cross-directional ply  
**Joint Profile** / tongue and groove  
**Sustainability** / FSC and LEED Certified / Reclaimed Product  
**Installation Method** / direct stick - refer to fortè installation guidelines  
**Underfloor Heating** / compatible with hydronic systems, for others contact Fortè's technical team  
**Warranty** / 25 year residential, 5 year commercial

## imondi plank product specifications

**NZBC Fire Ratings** / ISO 9705: Wall & Ceilings: Group 3 (Note: Fire shield can be applied to meet Group 1-S)  
**Reaction to Fire** / EN13501-1: Class Cfl - S1  
**Formaldehyde Emission** / EN717-1: E1  
**Timber Density** / 650kg/m<sup>3</sup>



Images are indication only, please see plank for true representation



## salvage pine raw plank

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SPRP15	15mm	4mm	70-230mm	400-2200mm



## salvage oak grey plank

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SOGP15	15mm	4mm	95-135mm	400-2200mm



## salvage oak weathered plank

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	SOWP15	15mm	4mm	95-135mm	400-2200mm

Also available in herringbone (indent)



## salvage oak brownstone plank


Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	SOBP21	21mm	6mm	70-270mm	400-2200mm



## salvage oak earth plank

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	SOEP15	15mm	4mm	95-135mm	400-2200mm

Also available in herringbone (indent)



imondi pine  
raw lamella  
p. 75

**project** - ray white offices, whangarei / **design** - DB interiors

# imondi – lamella.

## scope

Genuine reclaimed 4mm solid lamella crafted from European oak or Pine for wall panelling and ceilings coverings. Suitable for indoor use, not suitable for some wet areas.

## imondi lamella product details

**Construction** / solid veneer

**Species** / European oak or Pine

**Grade** / reclaimed

**Joint Profile** / butt joint

**Sustainability** / FSC and LEED Certified / Reclaimed Product

**Installation Method** / direct stick - refer to fortè installation guidelines

**Warranty** / 25 year residential, 5 year commercial



Images are indication only, please see plank for true representation



## pine raw lamella

Product	Stock	Code	Total Thickness	Width	Finish	Length
Lamella	stocked	SPR4	4mm	50-130mm	unfinished	300-1500mm

Also available in herringbone and chevron (indent)



## pine paint lamella

Product	Stock	Code	Total Thickness	Width	Finish	Length
Lamella	stocked	SPP4	4mm	50-130mm	unfinished	300-1500mm



## holland park lamella

Product	Stock	Code	Total Thickness	Width	Finish	Length
Lamella	stocked	SHP4	4mm	75-115mm	unfinished	300-1150mm


Also available in herringbone and chevron (indent)



## pine wind lamella

Product	Stock	Code	Total Thickness	Width	Finish	Length
Lamella	stocked	SPW4	4mm	50-130mm	lacquer	300-1500mm

Also available in herringbone and chevron (indent)

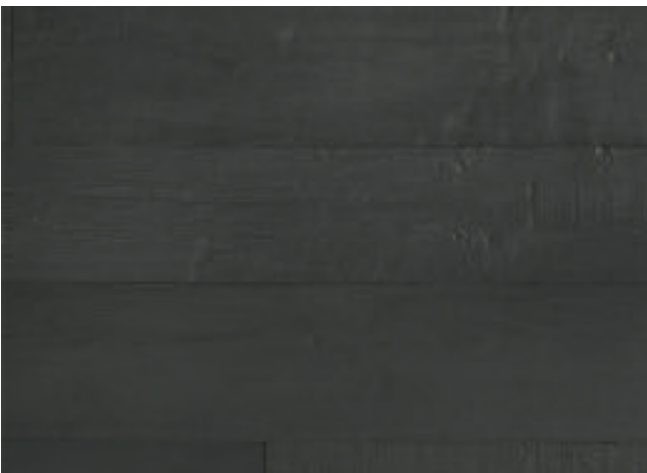

## pine fire lamella

Product	Stock	Code	Total Thickness	Width	Finish	Length
Lamella	stocked	SPF4	4mm	50-130mm	lacquer	300-1500mm

Also available in herringbone and chevron (indent)

ceiling - tactile  
loft white  
p. 78



# tactile.

15mm Pre-finished Rough-sawn  
Oak for Wall Panelling

walls - tactile  
loft white  
p. 78



### loft white

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	indent	TRSOLW	15mm	4mm	240mm	2200mm



### unfinished

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	TRSOUNF	15mm	4mm	240mm	2200mm

Over 100 custom colours available through Forté

# tactile.

## scope

Unique saw-marked, textural planks for wall panelling and ceilings.  
Suitable for indoor use, not suitable for some wet areas.

## tactile product details

- Construction / engineered plank
- Species / European oak
- Grade / feature
- Finish / oil
- Surface Texture / heavily saw-marked
- Core / cross-directional ply
- Backing / ply
- Joint Profile / tongue and groove
- Bevel / 4 sides
- Sustainability / all Forté products are sustainable, please visit [forteflooring.co.nz/environmental](http://forteflooring.co.nz/environmental)
- Installation Method / direct stick - refer to forté installation guidelines
- Warranty / 25 year residential, 5 year commercial

## tactile product specifications

- NZBC Fire Ratings / Wall & Ceilings: Group 3 (Note: Fire shield can be applied to meet Group 1-S)
- Formaldehyde Emission / E1
- Timber Density / 650kg/m3





## ebony

Product	Stock	Code	Total Thickness	Wear Layer	Width	Length
Plank	stocked	TRSOEB	15mm	4mm	240mm	2200mm



tactile ebony  
p. 79

ultra driftwood  
oak p. 53

tactile  
loft white  
p. 78



**project** - kinloch lodge, taupo / **architect** - pattersons architecture / **interior design** - virginia fisher





tactile ebony  
p. 79

# indoor...

## Indoor / Outdoor Flow

As a nation, New Zealander's thrive in outdoor spaces. Whether it is relaxing on the patio or hosting a BBQ on the deck, outdoor spaces are where we spend most of our time throughout the summer season. Indoor / outdoor flow is important in creating a seamless transition from your interior to exterior and in making these areas look more unified and spacious.

### Go for the contrast

Create a feature and contrast your deck with your floor. A distinct contrast between your deck and floor can look modern and sleek. For a more subtle contrast, look for similarities between the deck colour and the flooring colour - for example a light timber with a black grain will look great with a black deck. Don't be afraid to play around with textures, if you are going for contrasting colours, why not have a look at contrasting textures too.

### The perfect match

Match your deck with your timber to create a more uniform look, this consistent colour will create a seamless flow throughout. We offer a variety of timbers that are similar matches to Millboard, just ask one of our colour consultants for expert advice.

### Which direction?

Determine which way your interior timber planks have been laid and continue this direction

outside. This will strengthen the unity between the two areas. Note, remember that flooring laid length-ways makes a room feel longer and larger, whereas flooring laid cross-ways makes a room feel cosier and shorter.

### Floor flow

To enhance your indoor / outdoor flow avoid a step between these two areas. Decking that is the same level as your flooring creates a more seamless transition when moving between the spaces.

### Keep it consistent

By maintaining the same look throughout, your spaces will look more unified. For example, if you have timber floors throughout your interior, a composite such as millboard will keep that natural look and flow.

### Maintenance

Up-keep your exterior spaces to keep them looking and feeling fresh. Many decking products require year round maintenance to avoid the growth of algae or to upkeep that oiled colour. Millboard decking requires little to no maintenance and is also algae, fade and slip resistant.



# outdoor or both?

## Millboard Vs. Composite Decking

### Realistic timber look

Many composite decking boards are formed by extrusion, where the raw materials are mixed and forced through an opening that determines the shape of the end product. Millboard decking is hand-moulded from real timber then hand-coloured by our craftsmen, resulting in an exceptionally authentic wood-look finish – you'd hardly know it wasn't wood without close inspection.

### Low expansion & contraction

Many composite decking products have been known to expand and contract readily. Millboard decking is made from a unique resin mineral board that has a very low expansion and contraction rate at less than 0.01% (similar to concrete).

### Resistant to fading

Most composite decking products have a strong tendency to fade. Millboard is produced from UV stable materials and is highly resistant to fading.

### Highly slip resistant

Both composite and wood decking products can be very slippery which is made worse by wet-conditions and algae growth. Millboard's rubberised Lastane® coating gives it a fantastic anti-slip performance, and thanks to the wood-free, non-porous surface it does not support algae growth.

### Won't rot or break down from insects

Most composite decking combines plastic with wood fibers. Whereas Millboard decking is made from a wood-free material that will not rot and won't be broken down by insects.

### Hidden fixings

Many composite decking products require invasive fixings, some of which require pre-drilling. With Millboard, the special Durafix® screws are simply screwed straight into the face and the unique Lastane™ surface seals itself back over the heads, leaving virtually no evidence – no pre-drilling required!

### Low carbon footprint

BBA testing has verified the embodied carbon of Millboard decking to be 430g /CO<sub>2</sub>e per m<sup>2</sup>. This is the equivalent carbon footprint of a high-street latte.

### Environmentally friendly

Many composite decking products claim to be environmentally friendly but have no testing to support this. Millboard has been tested and its base material properties are excellent – its Ozone Depletion Potential (ODP) rating is zero, and Global Warming Potential (GWP) rating is also zero. The Millboard Company Ltd itself is an ISO 14001 certified company, complying with international environmental management practices.

millboard  
enhanced grain  
charred oak  
p. 87

millboard  
enhanced grain  
limed oak  
p. 87





# outdoor flooring.

**Outdoor is the new in** / the Forté brand is constantly evolving and our product researchers are always looking for new and innovative ways to enhance New Zealanders' living spaces. Forté recognises that outdoor flooring is just as important as interiors, that's why we have introduced our first range of decking – and it's said to be a game changer.

# millboard enhanced grain.

## scope

Premium wood-free decking & cladding, hand moulded from genuine timber planks recreating the subtle nuance of natural wood. Millboard is low-maintenance, stain, fade and slip resistant.

## enhanced grain product details

**Type** / pre-finished composite decking  
**Construction** / composite with highly durable coating  
**Surface** / polyurethane lastane® layer  
**Surface Texture** / light grain  
**Core** / mineral fibers reinforced with fiber glass  
**Bevel** / rounded long edges  
**Coverage** / 1.54 lengths per m<sup>2</sup>  
**Sustainability** / 430g CO<sub>2</sub>e/m<sup>2</sup> - the same carbon footprint as a latte coffee  
**Applications** / decks, balconies, roof gardens, public spaces, boardwalks, bridges, pontoons, cladding, seating, steps, planters and more  
**Installation Method** / durafix® hidden screw system  
**Edging** / matching square edging and fascia board available  
**Cleaning** / very low maintenance  
**Warranty** / 25 year residential or 5 years limited

MATCHING  
FASCIA &  
EDGING ON  
PAGE 92

## enhanced grain product specifications

**Fire Ratings** / Critical Radiant Flux 8.6kw/m<sup>2</sup> (Compliant)  
**Slip Resistance** / BS79.76 (UK): Dry Test: 77, excellent. Wet Test: 55, low slip potential  
**Dimensional Stability** / Very low expansion and contraction rate less than 0.01% or similar to concrete.  
 Expansion from dry air to saturated 0.01mm/m. Co efficient of thermal expansion 0.01%.  
 Non warping, twisting or buckling.  
**UV and weathering stability** / BSENISO 4892.2 (UK) UV: 5000 Hours (10-20 Years) Exceptional  
 MOAT22 & EN 772-22 (UK) Weather ability: (Freeze, thaw, warp, twist, camber) -20° to 70° exceptional  
**Density** / BBA (UK) 529.75kg/m<sup>3</sup>





## limed oak

Product	Stock	Code	Thickness	Width	Length
Plank	stocked	MDE176L	32mm	176mm	3600mm (1.54 lengths per m <sup>2</sup> )
Fascia	stocked	MFN320L	16mm	146mm	3200mm
Square edge	stocked	MEUN32L	33mm	50mm	3200mm
Touch-up	stocked	AP500L	-	-	-



## smoked oak

Product	Stock	Code	Thickness	Width	Length
Plank	stocked	MDE176D	32mm	176mm	3600mm (1.54 lengths per m <sup>2</sup> )
Fascia	stocked	MFN320D	16mm	146mm	3200mm
Square edge	stocked	MEUN32D	33mm	50mm	3200mm
Touch-up	stocked	AP500D	-	-	-

millboard®




## golden oak

Product	Stock	Code	Thickness	Width	Length
Plank	stocked	MDE176G	32mm	176mm	3600mm (1.54 lengths per m <sup>2</sup> )
Fascia	stocked	MFN320G	16mm	146mm	3200mm
Square edge	stocked	MEUN32G	33mm	50mm	3200mm
Touch-up	stocked	AP500G	-	-	-



## coppered oak

Product	Stock	Code	Thickness	Width	Length
Plank	stocked	MDE176C	32mm	176mm	3600mm (1.54 lengths per m <sup>2</sup> )
Fascia	stocked	MFN320C	16mm	146mm	3200mm
Square edge	stocked	MEUN32C	33mm	50mm	3200mm
Touch-up	stocked	AP500C	-	-	-

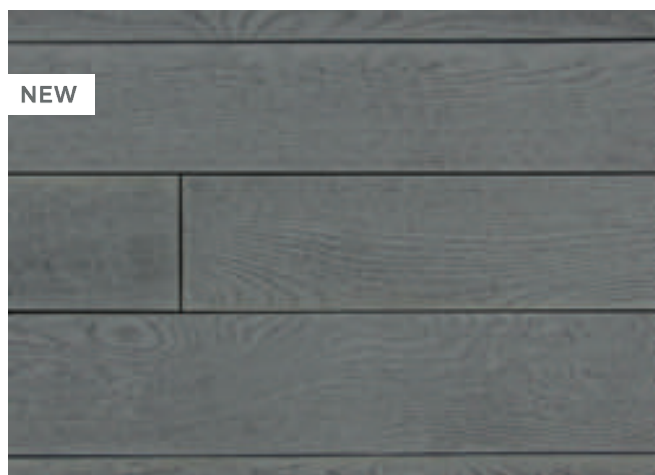

## brushed basalt

Product	Stock	Code	Thickness	Width	Length
Plank	stocked	MDE176B	32mm	176mm	3600mm (1.54 lengths per m <sup>2</sup> )
Fascia	stocked	MFN320B	16mm	146mm	3200mm
Square edge	stocked	MEUN32B	33mm	50mm	3200mm
Touch-up	stocked	AP500B	-	-	-

●  
millboard  
enhanced grain  
smoked oak  
p. 87







# millboard weathered.

## scope

Premium wood-free decking & cladding, handcrafted from 100 year old reclaimed weathered oak. Millboard is low-maintenance, stain, fade and slip resistant.

## weathered product details

**Type** / pre-finished composite decking  
**Construction** / composite with highly durable coating  
**Surface** / polyurethane lastane® layer  
**Surface Texture** / heavy grain  
**Core** / mineral fibers reinforced with fiber glass  
**Bevel** / rounded long edges  
**Coverage** / 1.53 lengths per m<sup>2</sup>  
**Sustainability** / 430g CO<sub>2</sub>e/m<sup>2</sup> - the same carbon footprint as a latte coffee  
**Applications** / decks, balconies, roof gardens, public spaces, boardwalks, bridges, pontoons, cladding, seating, steps, planters and more  
**Installation Method** / durafix® hidden screw system  
**Edging** / matching square edging and fascia board available  
**Cleaning** / very low maintenance  
**Warranty** / 25 year residential or 5 years limited

MATCHING  
FASCIA &  
EDGING ON  
PAGE 92

## weathered product specifications

**Fire Ratings** / Critical Radiant Flux 8.6kw/m<sup>2</sup> (Compliant)  
**Slip Resistance** / BS79.76 (UK): Dry Test: 81, very low slip potential. Wet Test: 65, low slip potential  
**Dimensionally Stability** / Very low expansion and contraction rate less than 0.01% or similar to concrete.  
 Expansion from dry air to saturated 0.01mm/m. Co efficient of thermal expansion 0.01%.  
 Non warping, twisting or buckling.  
**UV and weathering stability** / BSENISO 4892.2 (UK) UV: 5000 Hours (10-20 Years) Exceptional  
 MOAT22 & EN 772-22 (UK) Weather ability: (Freeze, thaw, warp, twist, camber) -20° to 70° exceptional  
**Density** / BBA (UK) 529.75kg/m<sup>3</sup>





millboard  
weathered  
embered  
p. 91

millboard®



## driftwood

Product	Stock	Code	Thickness	Width	Length
Plank	indent	MDW320	32mm	200mm	3200mm (1.53 lengths per m²)
Fascia	stocked	MFN320E	16mm	146mm	3200mm
Square edge	stocked	MEUN32D	33mm	50mm	3200mm
Touch-up	stocked	AP500D	-	-	-



## vintage Oak

Product	Stock	Code	Thickness	Width	Length
Plank	stocked	MDW320V	32mm	176mm	3600mm (1.54 lengths per m²)
Fascia	stocked	MFN320V	16mm	146mm	3200mm
Square edge	stocked	MEUN32V	33mm	50mm	3200mm
Touch-up	stocked	AP500V	-	-	-



## embered

Product	Stock	Code	Thickness	Width	Length
Plank	stocked	MDW320E	32mm	176mm	3600mm (1.54 lengths per m²)
Fascia	stocked	MFN320E	16mm	146mm	3200mm
Square edge	stocked	MEUN32E	33mm	50mm	3200mm
Touch-up	stocked	AP500E	-	-	-

# millboard accessories.



## matching fascia

Product	Stock	Thickness	Width	Length
Plank	stocked	16mm	146mm	3200mm



## matching square edging

Product	Stock	Thickness	Width	Length
Plank	stocked	33mm	50mm	3200mm



## touch-up coating

Product	Stock	Code	Size
Coating	stocked	AP500	500ml tin

Perfect for blending in cut ends, the touch-up coating is available in a range of 8 colours to match your choice of Millboard.



## durafix® hidden screws

Product	Stock	Code	Thickness	Width
Screws	stocked	FT6	60mm	4.5mm

For the Weathered Oak collection, you will need **18** screws per board for **residential** projects and **24** screws per board for **commercial** projects.

For the Enhanced Grain collection, you will need **16** screws per board for **residential** projects and **22** screws per board for **commercial** projects.



# construction.



millboard®

- ① The structural core is a blend of natural minerals bonded in a polymer resin with long fibre reinforcement for added strength and durability
- ② Millboard is solid, not hollow, meaning it's strong and won't warp, rot like wood or harbour insects and pests.
- ③ The unique 'cellular' internal structure reduces weight while maintaining strength
- ④ The unique lastane® layer resists scratches and stains and is designed to withstand demanding outdoor environments
- ⑤ Millboard is wood-free and non-porous, which means high resistance to algae growth and excellent anti-slip properties
- ⑥ The dual-tone lastane® surface is hand tinted using pigments designed to resist fading and sun damage

<h2>Great reasons to choose Millboard</h2>	 <p><b>UV &amp; weathering stability.</b> Tested in all weathers at temperatures from -20° to 70°</p>	 <p><b>Dimensional stability.</b> Very minimal movement in the boards</p>
	 <p><b>Stain resistant.</b> Non-porous, so will not absorb dirt, drinks, food, fats etc.</p>	 <p><b>Slip-resistant.</b> High grip surface much safer than wood, especially in the wet</p>
 <p><b>Manufactured in the UK</b> using UK non-wood fillers</p>	 <p><b>Environmentally friendly.</b> Base materials have low impact on global warming and ozone depletion</p>	 <p><b>Moulded from real oak.</b> Not extruded like plastics. Looks like natural oak</p>
 <p><b>Splinter-free.</b> No real wood content, so no splinters</p>	 <p><b>Low maintenance.</b> No stains from food or drinks spills. No algal growth. No painting required</p>	 <p><b>'Lost head' fixing</b> using Durafix stainless steel trimhead screws</p>
 <p><b>Resistant to algae.</b> Unlike wood, there is no protein content to assist algal growth</p>	 <p><b>Does not warp or rot.</b> No timber content that will rot or can be eaten by insects</p>	 <p><b>430g/M²</b> Low carbon footprint</p>



**Product** / bona wood floor cleaner  
**For use on** / oil and lacquer finished floors  
**Compatible with** / bona spray mop  
**Available in** / 0.85L cartridge  
**Code** / BSMWC-0.85L



**Self-levelling Compound / Concrete substrates**  
**Product** / mapei ultraplan eco  
**Use** / Interior levelling from 1-10mm  
**Available in** / 23kg bag  
**Code** / MUPE



**Product** / bona oil soap  
**For use on** / oil finished floors  
**Available in** / 1L bottle  
**Code** / BS-1L



**Moisture Barrier**  
**Product** / mapei mapeproof 1k turbo  
**Use** / waterproofing & consolidating screeds  
**Available in** / 10kg pail  
**Coverage** / 50m<sup>2</sup> per 10kg  
**Code** / MPT



**Product** / bona wood floor cleaner  
**For use on** / oil and lacquer finished floors  
**Compatible with** / bona spray mop or bottle  
**Available in** / 2.5L bottle  
**Code** / BSWMC-2.5L



**Adhesive**  
**Product** / mapei ultrabond eco S955 1K  
**Use** / for bonding wooden flooring  
**Available in** / 21kg pail  
**Coverage** / 800-1200 g/m<sup>2</sup>  
**Code** / MUB955



**Product** / bona freshen up coating  
**For use on** / lacquered floors  
**Available in** / 1L bottle  
**Code** / BTF1L



**Adhesive, Moisture Barrier & Sound Reducer**  
**Product** / mapei ultrabond eco 995 3in1  
**Use** / for bonding wooden flooring & bamboo  
**Available in** / 33kg pail  
**Code** / MUB995



**Adhesive, one-component, solvent-free**  
**Product** / mapei ultrabond P997 1k 600cc  
**Use** / for bonding engineered timber flooring  
**Available in** / 600ml sausage  
**Code** / MUB997SAU



**Joint Sealing Adhesive & Moisture Barrier**  
**Product** / unika clicseal  
**Use** / for timber and laminate joints  
**Available in** / 125ml tube  
**Code** / UCS125



**Product** / bona spray mop  
**For use on** / wood floors & all surfaces  
**Compatible with** / bona wood floor cleaner  
**Code** / BSMK-WF



**Adhesive, ready-to-use, one component**  
**Product** / mapei ultrabond P990 1k  
**Use** / for bonding wood parquet  
**Available in** / 600ml sausage  
**Code** / MUB990SAU



**Product** / bona microfibre cleaning pad  
**For use on** / all surfaces  
**Compatible with** / bona spray mop  
**Code** / BCBCP



**Bostik Dual Purpose Caulking Gun**  
**Use** / for use with cartridges and sausages  
**Code** / BDPCG



**Product** / bona microfibre dusting pad  
**For use on** / all surfaces  
**Compatible with** / bona spray mop  
**Code** / BWMDP



**Suction Handle**  
**Use** / for moving planks once placed on floor  
**Code** / SH32



**Self-levelling Compound / Timber substrates**  
**Product** / mapei fiberplan  
**Use** / Interior levelling from 3-10mm  
**Available in** / 25kg bag  
**Code** / MFP





## sound-guard xtreme / for floating floors

**Level** / High performance

**Use** / with floated engineered flooring

**Total Thickness** / 2.5mm **Width** / 1m **Length** / 10m

**Core** / Natural Rubber

**Backing** / Reinforced nylon with insulating foil

**Density** / 750kg/m<sup>3</sup>

Product	Size	Code	Stock
Underlay Roll	10m <sup>2</sup> / roll	SGX10	Stocked



## acoustic-mat / for glue down flooring

**Level** / Specialised sound-reducing underlay

**Use** / with engineered flooring

**Total Thickness** / 5mm **Width** / 0.5m **Length** / 1m (2 sheets per m<sup>2</sup>)

**Specialty** / Reduces sound transfer in multi-level buildings by up to 18db

**Construction** / Recycled rubber and cork

**Density** / 650kg/m<sup>3</sup>

Product	Size	Code	Stock
Underlay Box	10m <sup>2</sup> / box	AKM05	Stocked



underlay.



ultra vintage  
oak p. 56

**A**

Accessories 94  
 Acoustick-Mat (Underlay) 95  
 Adhesives (Mapei) 94  
 Angled trim 25  
 Antique Oak (Smartfloor) 46  
 Atelier 24

**B**

Black Forest (Manor Classique) 29  
 Blond Oak (Smartfloor) 45  
 Bona Products 94  
 Bordeaux Oak (Ultra) 53  
 Brass Trims 25  
 Brownstone (Imondi) 73  
 Brushed Basalt (Millboard) 87

**C**

Cannelton (Manor Rustique) 32  
 Cashmere (Villa) 36  
 Caulking Gun (Bostik) 94  
 Ceiling Panelling 69  
 Champagne Oak (Ultra) 53  
 Charred Oak (Millboard) 87  
 Chevron Unfinished (Manor) 61  
 Chevron Unfinished (Pro-Plank) 65  
 Cladding (Millboard) 87, 91  
 Classic (Manor Atelier) 29  
 Cleaners 94  
 Cleaning Pads 94  
 Cobble Stone (Manor Atelier) 25  
 Cocoa (Villa) 37  
 Composite Decking 87, 91  
 Copenhagen (Urban Plank) 40  
 Coppered Oak (Millboard) 87  
 Coral Oak (Smartfloor) 46  
 Custom Colour 65

**D**

Decking 85  
 Driftwood (Millboard Decking) 91  
 Driftwood Oak (Ultra) 53  
 Dune (Villa) 37  
 Durafix Screws (Millboard) 92

**E**

Earth Plank (Imondi) 73  
 Ebony (Tactile) 79  
 Embered Oak (Millboard) 91  
 Engineered Flooring 21  
 Enhanced Grain Range (Millboard) 87  
 Environmental contents  
 European Oak 35, 39, 43, 51, 63, 77

**F**

Flooring 21  
 Feature Oak (Pro-Plank) 65  
 Feature Oak (Smartfloor) 45  
 French Oak 24, 28, 32, 61

**G**

Glue 94  
 Golden Oak (Millboard) 87  
 Graphite Oak (Smartfloor) 46

**H**

Heathered Grey (Manor Classique) 29  
 Herringbone Antique Oak (Smartfloor) 46

Herringbone Blond Oak (Smartfloor) 45  
 Herringbone Feature Oak (Smartfloor) 45  
 Herringbone Prime Oak (Smartfloor) 45  
 Herringbone Unfinished (Manor) 61  
 Herringbone Unfinished (Pro-Plank) 65  
 Hillsdale (Manor Classique) 28  
 Holland Park Lamella (Imondi) 75

**I**

Imondi 71  
 Imondi Lamella 75

**L**

La Grange (Manor Classique) 29  
 Lamella 75  
 Lignite Oak (Smartfloor) 46  
 Limed Oak (Millboard) 87  
 Limestone (Villa) 37  
 Loft White (Tactile) 78  
 London (Urban Plank) 40

**M**

Madrid (Urban Plank) 41  
 Malachite (Manor Atelier) 25  
 Manor Atelier 25  
 Manor Classique 28  
 Manor Collection 23  
 Manor Rustique 32  
 Manor Unfinished 61  
 Mapei Products 94  
 Marbled Oak (Ultra) 53  
 Marron Oak (Smartfloor) 46  
 McKinny (Manor Rustique) 33  
 Milan (Urban Plank) 41  
 Millboard Screws 92  
 Millboard Decking 87, 91  
 Mink Grey Oak (Ultra) 56  
 Moisture Barrier (Mapei) 94

**N**

Natural (Manor Atelier) 24  
 Natural (Tactile - Rough-sawn) 78  
 New York (Urban Plank) 41

**O**

Oak Earth Plank (Imondi) 73  
 Oak Grey Plank (Imondi) 73

**P**

Paris (Urban Plank) 41  
 Panelling (Walls & Ceilings) 69, 21  
 PEFC Certification 24, 28, 32, 59  
 Pine Fire Lamella (Imondi) 75  
 Pine Paint Lamella (Imondi) 75  
 Pine Raw Lamella (Imondi) 75  
 Pine Raw Plank (Imondi) 73  
 Pine Wind Lamella (Imondi) 75  
 Prime Oak (Pro-Plank) 65  
 Prime Oak (Smartfloor) 45  
 Pro-Plank 63

**R**

Raven (Villa) 37  
 Reclaimed 71, 73, 75  
 Rough-sawn (Flooring) 35  
 Rough-sawn (Wall Panelling) 77

**S**

Salvage Imondi 73

Sandstone Oak (Smartfloor) 45  
 Screws 92  
 Self-Levelling Compounds (Mapei) 94  
 Slate Grey (Manor Rustique) 32  
 Smartfloor 43  
 Smoked Oak (Millboard) 87  
 Sound-Guard Xtreme (Underlay) 95  
 Spray Mop (Bona) 94  
 Spray Mop (Glide) 94  
 Stair Nosing (Manor) 24, 28, 32, 59  
 Stair Nosing (Smartfloor) 43  
 Stair Nosing (Ultra) 51

**T**

Tactile 77  
 Tokyo (Urban Plank) 41  
 Tussock Oak (Ultra) 57

**U**

Ultra 51  
 Underlay 95  
 Unfinished Manor 59  
 Unfinished (Tactile) 78  
 Unfinished Villa 37

**V**

Versailles Unfinished (Manor) 61  
 Vienna (Urban Plank) 41  
 Vintage Oak (Millboard) 91  
 Vintage Oak (Ultra) 56

**W**

Wall Panelling 69  
 Weathered Oak Plank (Imondi) 73  
 Weathered Range (Millboard) 91  
 Wheat (Villa) 37

**Y**

Yacona (Manor Classique) 29





t&amp;c's.

**Buyer's Awareness**

**Batch Variation** - There may be colour variation between batches. It is recommended to request a current batch sample if this is of concern to you. Please note: There will be colour variation within batches that cannot be represented from a small sample.

**Colour and Grain Variation** - Wood is a natural product and each piece will vary in colour and grain. Please understand that product will differ to what is shown by a display panel or sample. This variation is part of the natural look and should not be considered a fault.

**Fading/darkening over time** - Natural wood products react to sunlight, resulting in fading or darkening over time. For example, a natural coloured oak turns more golden from sunlight exposure. This is a naturally occurring process and is not considered a product fault. In general, lighter colours tend to darken while darker colours are more likely to fade.

**Pricing**

All prices in this catalogue are excluding GST. Forté retain the right to alter any pricing at any time without notice.

**Stocked and Indent products**

**Stocked** products are kept on hand in our warehouse with an approximate lead time of 24 hours. Please note that some styles are occasionally low or sold out due to high levels of demand. **Indent** products are made to order or ordered on request, with an approximate lead time of 14-16 weeks. Please note that indent items have a minimum order quantity. Please check stock levels with our customer care team before placing orders.

**Securing Stock**

A 50% deposit is required to a) hold or secure stock, b) order an indent product. For indents, balance payment is due when product arrives in the country.

**Product imagery**

All imagery in this publication is an indication only. Please view life planks for a true colour and textural representation. No part of this publication may be reproduced without the permission of Forté.

**Shipping**

**Samples** - Free throughout New Zealand (NZ- Free Delivery. Worldwide - Delivery is priced on application)

**Orders** - Delivery is priced on application. Same day delivery is available throughout the Auckland Region.

**Returns Policy**

Damage caused during transportation must be reported to the supplier within 5 days of delivery, prior to the installation of the floor. Unopened and undamaged packs left over after job completion may be returned for credit. Freight costs are at the owner's expense plus a restocking and handling fee of \$100 + GST applies. This will be deducted from your credit. Any opened packs will not be accepted, even if the product has not been taken from them.

**Warranty**

Any faulty product must be reported to the supplier within 5 days of delivery. Refer to the website for full Warranty details.

## 2001

The Heritage Timbers sawmill was purpose built in Pukekohe. Native New Zealand Timbers were sought and milled here and made into furniture, joinery and more. A majority was sold on to be made into native timber flooring.

## 2009

The company battled through some difficult years and emerged in 2009 with a new vision... To specialise in Engineered Timber Flooring.



## 2007

After James' father retired, the company faced major logging restrictions imposed by the government. This made native New Zealand timbers very difficult to source.



## 1990

James founded Heritage Timbers with his father, Kelvin. This grew to become one of New Zealand's largest native timber wholesalers.

## 1985

Current owner, James, started his business named Heritage Design. He specialised in making intricate Kauri furniture.





## 2016

The first Forté showroom opened in Kingsland, Auckland. This provides a space for customers to view our full range in larger scale.



## 2017

A re-brand was implemented to reflect the company's position in the market. Along with a stylish new look, Forté Flooring became 'Forté'.



## 2018

Forté Queenstown Showroom opened in July 2018



## 2014

The company changed from Heritage Timbers to Forté Flooring and quickly grew to become one of New Zealand's leading Timber Flooring and Wall Covering specialists.



## 2018

Forté introduce their first range of outdoor flooring by exclusively bringing Millboard premium decking to the New Zealand market.

## 2017

Forté started specialising in architectural products and working with renowned architects and designers throughout New Zealand.