

FEATURE PLANK SPECIFICATION SHEET

Moda Altro Collection Engineered T&G plank by Forté. 15mm thick, 220mm wide, 2190mm or 1830mm length. Direct stick installation method onto substrate. Feature grade, pre-finished with NatureMatte Lacquer

PRODUCT DETAILS

Collection	Moda Altro
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	15mm
Width	220mm
Length	2190mm (Mondello and Verona are also available in 1830mm length)
% of Shorts	Up to 17%
Wear Layer	4mm Solid European Oak
Core	Hevea
Backing Layer	Spruce Veneer
Construction	3-layer Engineered
Re-sands	Up to 2 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Extra Matte (4-6%)
Bevel	Micro bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	NatureMatte Lacquer (7 coats)
Species	European Oak
Wood Grade	Feature (refer page 2 for details)
Filler Colour	Dark

The Moda Altro Collection is also available in: Light feature plank, herringbone pattern and stair nosing

STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties

SUSTAINABILITY

PEFC® Certified



INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 5.0kw/m ²
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
Wear Layer Density	700kg/m ³
<u>Formaldehyde Emission</u>	
AS/NZS 2098.11	E0 (0.1mg/L) Low VOC, No added Formaldehyde
<u>Slip Ratings</u>	
AS/NZS 4586 Wet Test	Classification F, Mean COF 0.60
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 43 BPN

PACK INFORMATION

<u>2190mm Length</u>	
Pack Size	2.890m ²
Pack Weight	27.30kg
Pieces per pack	5 full planks + 1 split plank
<u>1830mm Length</u>	
Pack Size	2.416m ²
Pack Weight	22.8kg
Pieces per pack	5 full planks + 1 split plank

Plank Profile

MODA ALTRO PLANK

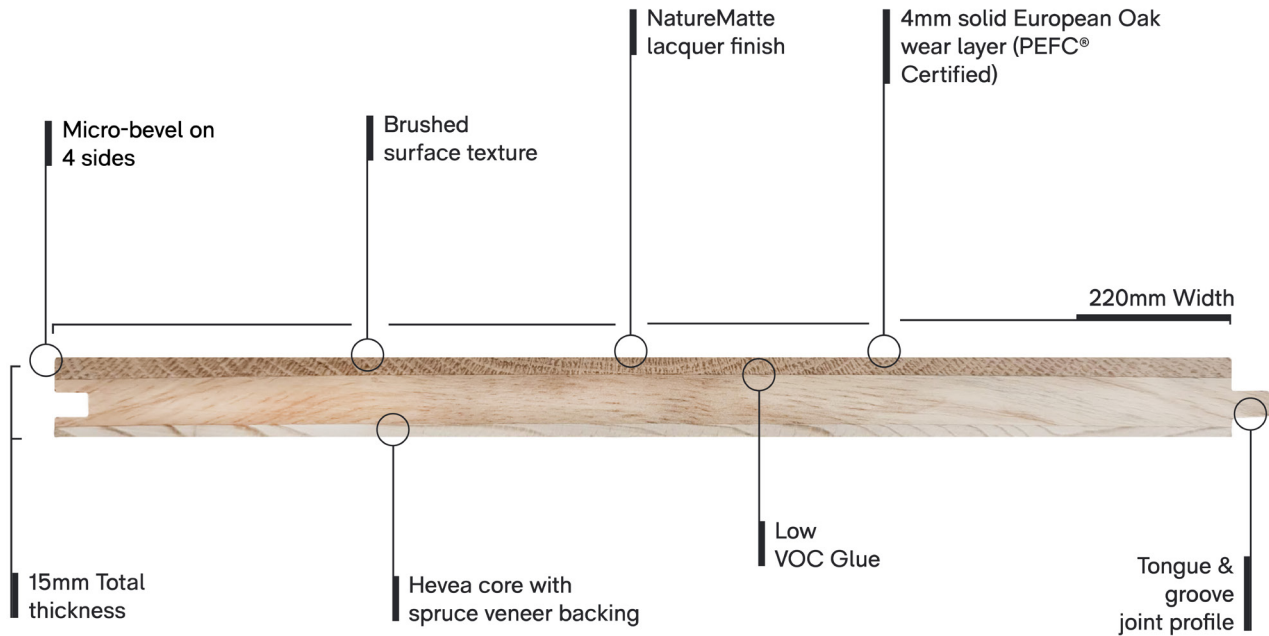

MODA ALTRO – FEATURE GRADE



A Moda Altro Feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

MODA ALTRO 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

MODA ALTRO 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE MODA ALTRO COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda Altro timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation