

Plank Specification Sheet

Artiste Collection Engineered T&G plank by Forté.
19mm thick, 250mm wide, in 2.5m plank lengths. Direct stick installation method onto substrate. Pre-finished with UV Cured Matte Lacquer.

PRODUCT DETAILS


Collection	Artiste Grande
Product Type	Engineered Plank
Availability	Custom Order
Total Thickness	19mm
Width	250mm
Length	2500mm
% of Shorts	Up to 25%
Wear Layer	5mm Solid Smoked European Oak* (may vary depending on surface effects)
Core	Birch Plywood
Construction	14mm Engineered Core + 5mm Solid Smoked Oak wear layer*
Re-sands	Approximately 4-5 (approx. 1mm removed per re-sand)
Surface Texture	Undulating surface, occasional saw-markings
Surface Sheen	Extra Matte
Bevel	Micro-bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	Bona Lacquer
Species	Smoked European Oak* (refer page 2 for details)
Wood Grade	Rustic (refer page 2 for details)
Filler colour	Dependant on colour, visit forte.co.nz for accurate filler colour

The Artiste Grande Collection is also available in: 250mm planks, Herringbone and Chevron patterns.


*Da Vinci, Van Gogh and Vermeer are Smoked European Oak.
Picasso is European Oak (but has not been smoked).

SUSTAINABILITY


Sustainably Sourced




Picasso



Da Vinci



Van Gogh



Vermeer

STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties

INSTALLATION

Installation Method	Directly Stick / Glue Down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	Awaiting test results
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 2.2kw/m ² (generic)
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1
Wear Layer Density	700kg/m ³
Formaldehyde Emission	
AS/NZS 2098.11	E0 (0.12mg/L) & CARB-2 Compliant No added Formaldehyde
Slip Ratings	
AS/NZS 4586 Dry Test	Classification F, Mean COF 0.65
AS/NZS 4586 Wet Test	Classification X, Pendulum Mean 42 BPN

PACK INFORMATION

Pack Size	2.411m ²
Pieces per pack	3 full planks, and up to 1 split plank
Pack Weight	72kg

Plank Profile

ARTISTE GRANDE PLANK

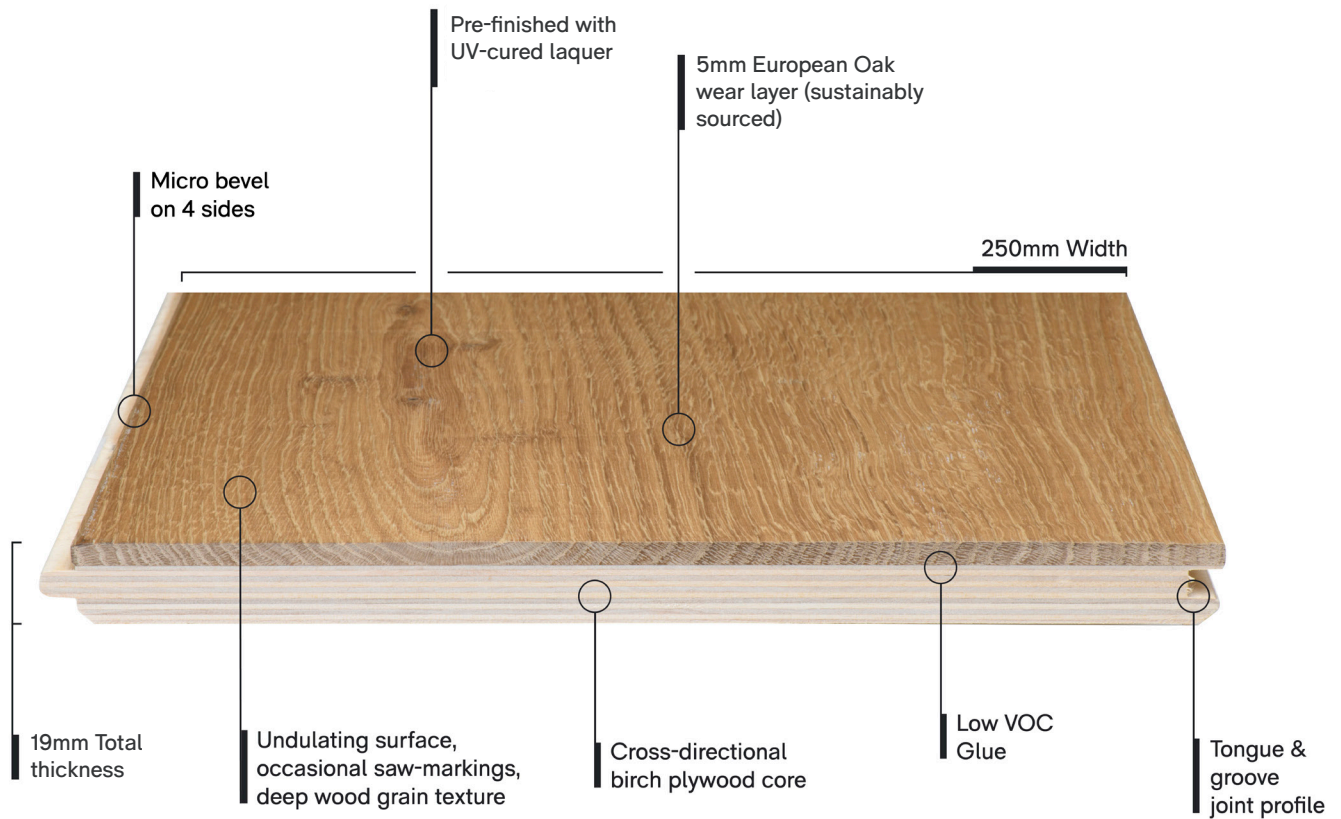

ARTISTE GRANDE – RUSTIC GRADE



An Artiste Grande, rustic grade plank will typically contain natural colour variation. This grade allows for more frequent, larger knots and sapwood may be expected throughout the planks. Larger cracks and checks will be present and are finished with a dark shade of filler.

SMOKED EUROPEAN OAK



Smoked or fumed timber has been treated to alter the colour depth and tonal variation of the wood. To find out more, visit forte.co.nz/advice/what-is-smoked-timber

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

ARTISTE GRANDE 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Artiste Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

ARTISTE GRANDE 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Artiste Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE ARTISTE GRANDE COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Artiste Grande timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation